

## **Schedules**

**Annex - I**  
**(Schedule-A)**

**Site**

[Note: Through suitable drawings and description in words, the land, buildings, structures and road works comprising the Site shall be specified briefly but precisely in this Annex-I. All the chainages/location referred to in Annex-I to Schedule-A shall be existing chainages.]

**1. Site**

The Site of the [Two-Lane] Project Highway comprises the section of [Tamenglong-Mahur Road] commencing from km 54+180 to km 80+630 i.e. the Azuram- Mandeu section (Pkg-5) in the State of Manipur. The land, carriageway and structures comprising the Site are described below.

**2. Land**

The Site of the Project Highway comprises the land (sum total of land already in possession and land to be possessed) as described below:

S. No.	Design Chainage (km)		Existing Right of Way (m)	Proposed Right of Way (m)	Remarks
	From	To			
1.	54180	54800	6-7m	45	Azuram Village
2.	54800	55000		30	
3.	55000	56700		40	
4.	56700	56900		30	
5.	56900	57300		40	
6.	57300	57500		30	
7.	57500	57950		35	
8.	57950	58300		30	
9.	58300	58800		40	
10.	58800	59600		30	
11.	59600	60300		35	
12.	60300	60500		40	
13.	60500	60700		30	
14.	60700	61200		35	
15.	61200	62350		40	
16.	62350	62550		30	
17.	62550	62900		45	
18.	62900	63300		35	

19.	63300	63700	6-7m	40	Azuram Village
20.	63700	64000		30	
21.	64000	64400		40	
22.	64400	65150		35	
23.	65150	65400		30	
24.	65400	65650		35	
25.	65650	65850		40	
26.	65850	66050		30	
27.	66050	66450		35	
28.	66450	66850		45	
29.	66850	67500		30	
30.	67500	68150		35	
31.	68150	68300		40	
32.	68300	69500		35	
33.	69500	70150		30	
34.	70150	70550		45	
35.	70550	71500		35	
36.	71500	71900		30	
37.	71900	72300		35	
38.	72300	73000		35	
39.	73000	74500		35	
40.	74500	74900		40	
41.	74900	75100		35	
42.	75100	75500		35	
43.	75500	75800		30	
44.	75800	76200		35	
45.	76200	76500		40	
46.	76500	77300		35	
47.	77300	77650		30	
48.	77650	77900		45	
49.	77900	78200		30	
50.	78200	79150	40		
51.	79150	79400	30		

52.	79400	79750	6-7m	35	Mandeu Village
53.	79750	80150		30	
54.	80150	80630		45	

### 3. Carriageway

The present carriageway of the Project Highway is [Single lane]. The type of the existing pavement is [Earthen Track].

### 4. Major Bridges

The Site includes the following Major Bridges:

S.No.	Chainage (km)	Type of Structure			No. of Spans with span length (m)	Width (m)
		Foundation	Sub-structure	Superstructure		
NIL						

### 5 Road over-bridges (ROB)/ Road under-bridges (RUB)

The Site includes the following ROB (road over railway line)/RUB (road under railway line):

S.No.	Chainage (km)	Type of Structure		No. of Spans with span length (m)	Width (m)	ROB/ RUB
		Foundation	Superstructure			
NIL						

### 6 Grade separators

The Site includes the following grade separators:

S.No.	Chainage (km)	Type of Structure		No. of Spans with span length (m)	Width (m)
		Foundation	Superstructure		
NIL					

### 7 Minor bridges

The Site includes the following minor bridges:

S.No.	Chainage (km)	Type of Structure			No. of Spans with span length (m)	Width (m)
		Foundation	Sub-structure	Superstructure		
1	46655	Bailey Bridge			1x45m	4.8

## 8 Railway level crossings

The Site includes the following railway level crossings:

S. No.	Location (km)	Remarks
NIL		

## 9 Underpasses (vehicular, non vehicular)

The Site includes the following underpasses:

S. No.	Chainage (km)	Type of Structure	No. of Spans with span length (m)	Width (m)
NIL				

## 10 Culverts

The Site has the following culverts:

S.No.	Chainage (km)	Type of Culvert	Span /Opening with span length (m)	Width (m)
1	39350	HPC	1 ROW 900	5.0
2	45400	HPC	1 ROW 900	5.0

## 11 Bus bays

The details of bus bays on the Site are as follows:

S. No.	Chainage (km)	Length (m)	Left Hand Side	Right Hand Side
NIL				

## 12 Truck Lay byes

The details of truck lay byes are as follows:

S. No.	Chainage (km)	Length (m)	Left Hand Side	Right Hand Side
NIL				

## 13 Road side drains

The details of the roadside drains are as follows:

S. No.	Location		Type	
	From km	to km	Masonry/cc (Pucca)	Earthen (Kutchha)
NIL				

#### 14 Major junctions

The details of major junctions are as follows:

S. No.	Location		At grade	Separated	Category of Cross Road			
	From km	To km			NH	SH	MDR	Others
NIL								

(NH: National Highway, SH: State Highway, MDR: Major District Road)

#### 15 Minor junctions

The details of the minor junctions are as follows:

S. No.	Location		Type	
	From km	To km	T-junction	Cross road
NIL				

#### 16 Bypasses

The details of the existing road sections proposed to be bypassed are as follows:

S. No.	Name of bypass (town)	Chainage (km) From km to km	Length (in Km)
NIL			

#### [17 Other structures] -NIL

[Provide details of other structures, if any.]

Annex – II  
(Schedule-A)

**Dates for providing Right of Way**

The dates on which the Authority shall provide Right of Way of Construction Zone to the Contractor on different stretches of the Site are stated below:

<b>Sl. No</b>	<b>From km to km</b>	<b>Length (km)</b>	<b>Width (m)</b>	<b>Date of providing ROW*</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>
(i) Full Right of Way (full width) (a) Stretch (b) Stretch (c) Stretch				30-45m ROW will be provided before appointed date
(ii) Part Right of Way (part width) (a) Stretch (b) Stretch (c) Stretch				
(iii) Balance Right of Way (width) a) Stretch b) Stretch c) Stretch				

\* The dates specified herein shall in no case be beyond 150 (one hundred and fifty) days after the Appointed Date.

Annex - III

*(Schedule-A)*

**Alignment Plans**

The existing alignment of the Project Highway shall be modified in the following sections as per the alignment plan indicated below:

- (i) The alignment of the Project Highway is enclosed in alignment plan. Finished road level indicated in the alignment plan shall be followed by the contractor as minimum FRL. In any case, the finished road level of the project highway shall not be less than those indicated in the alignment plan. The contractor shall, however, improve/upgrade the Road profile as indicated in Annex-III based on site/design requirement.
- (ii) Traffic Signage plan of the Project Highway showing numbers & location of traffic signs is enclosed. The contractor shall, however, improve/upgrade upon the traffic signage plan as indicated in Annex-III based on site/design requirement as per IRC: SP: 99 & IRC: 67.

Annex - IV

*(Schedule-A)*

**Environment Clearances**

The following environment clearances have been obtained:

- Environmental Clearance is not required as per new Notification of MoEF dated 22/08/2013.

**SCHEDULE - B**  
*(See Clause 2.1)*

**Development of the Project Highway**

**1 Development of the Project Highway**

Development of the Project Highway shall include design and construction of the Project Highway as described in this Schedule-B and in Schedule-C.

**2 [Rehabilitation and augmentation]**

[Rehabilitation and augmentation] shall include [Two-Laning and strengthening] of the Project Highway as described in Annex-I of this Schedule-B and in Schedule-C.

**3 Specifications and Standards**

The Project Highway shall be designed and constructed in conformity with the Specifications and Standards specified in Annex-I of Schedule-D.

Annex - I  
(Schedule-B)

**Description of [Two-Laning]**

[Note: Description of the Project Highway shall be given by the Authority in detail together with explanatory drawings (where necessary) to explain the Authority's requirements precisely in order to avoid subsequent changes in the Scope of the Project. The particulars that must be specified in this Schedule-B are listed below as per the requirements of the Manual of Specifications and Standards for [Two Laning of Highways (IRC:SP:73-2018)], referred to as the Manual. If any standards, specifications or details are not given in the Manual, the minimum design/construction requirements shall be specified in this Schedule. In addition to these particulars, all other essential project specific details, as required, should be provided in order to define the Scope of the Project clearly and precisely.]

**1 WIDENING OF THE EXISTING HIGHWAY**

- (i) The Project Highway shall follow the existing alignment unless otherwise specified by the Authority and shown in the alignment plans specified in Annex III of Schedule-A. Geometric deficiencies, if any, in the existing horizontal and vertical profiles shall be corrected as per the prescribed standards for [plain/rolling/hilly] terrain to the extent land is available.
- (ii) Width of Carriageway
  - a) Two- Lane with with paved shoulder in Hilly Terrain with Hill side Drain on Both sides in open Country area Without Retaining Wall (Box cut): - The Carriageway shall be 7.0 m wide with 1.5 m. paved shoulder both side shall be provided. The width of carriage way shall be specified in following table:

Sl. No.	Built-up stretch (Township)	Design Chainage		Width (m)	Length (km)	Typical cross section (Ref. to Manual)
		From	To			
1.	-	54180	54700	7+2x1.5=10 m	0.520	Fig 2.11 (New)
2.	-	56000	56650	7+2x1.5=10 m	0.650	Fig 2.11 (New)
3.	-	56850	57250	7+2x1.5=10 m	0.400	Fig 2.11 (New)
4.	-	57800	57900	7+2x1.5=10 m	0.100	Fig 2.11 (New)
5.	-	58450	58750	7+2x1.5=10 m	0.300	Fig 2.11 (New)
6.	-	60350	60450	7+2x1.5=10 m	0.100	Fig 2.11 (New)
7.	-	60650	60850	7+2x1.5=10 m	0.200	Fig 2.11 (New)
8.	-	61900	62050	7+2x1.5=10 m	0.150	Fig 2.11 (New)
9.	-	63350	63650	7+2x1.5=10 m	0.300	Fig 2.11 (New)
10.	-	63950	64350	7+2x1.5=10 m	0.400	Fig 2.11 (New)
11.	-	64550	65100	7+2x1.5=10 m	0.550	Fig 2.11 (New)
12.	-	65400	65800	7+2x1.5=10 m	0.400	Fig 2.11 (New)

13.	-	66000	66350	7+2x1.5=10 m	0.350	Fig 2.11 (New)
14.	-	66450	67000	7+2x1.5=10 m	0.550	Fig 2.11 (New)
15.	-	67400	68150	7+2x1.5=10 m	0.750	Fig 2.11 (New)
16.	-	68300	68550	7+2x1.5=10 m	0.250	Fig 2.11 (New)
17.	-	69350	69500	7+2x1.5=10 m	0.150	Fig 2.11 (New)
18.	-	70150	70500	7+2x1.5=10 m	0.350	Fig 2.11 (New)
19.	-	72050	72350	7+2x1.5=10 m	0.300	Fig 2.11 (New)
20.	-	72500	73050	7+2x1.5=10 m	0.550	Fig 2.11 (New)
21.	-	75350	75500	7+2x1.5=10 m	0.150	Fig 2.11 (New)
22.	-	75750	76000	7+2x1.5=10 m	0.250	Fig 2.11 (New)
23.	-	76250	76500	7+2x1.5=10 m	0.250	Fig 2.11 (New)
24.	-	76600	76700	7+2x1.5=10 m	0.100	Fig 2.11 (New)
25.	-	77700	78000	7+2x1.5=10 m	0.300	Fig 2.11 (New)
26.	-	78250	78700	7+2x1.5=10 m	0.450	Fig 2.11 (New)
27.	-	78800	79000	7+2x1.5=10 m	0.200	Fig 2.11 (New)
28.	-	79450	79650	7+2x1.5=10 m	0.200	Fig 2.11 (New)
29.	-	80150	80400	7+2x1.5=10 m	0.250	Fig 2.11 (New)
Total Length					9.470km	

- b) Two Lane Road with Paved shoulders in Hilly Terrain with Hill side drain & Retaining Wall:- The Carriageway shall be 7.0 m wide with 1.5 m paved shoulder both side and 1.0 m Granular shoulder valley side shall be provided. The width of carriageway specified following table-

Sl. No.	Built-up stretch (Township)	Design Chainage		Width (m)	Length (km)	Typical cross section (Ref. to Manual)
		From	To			
1.	-	54700	55400	7+2x1.5+1x1=11 m	0.700	Fig 2.8
2.	-	55600	56000	7+2x1.5+1x1=11 m	0.400	Fig 2.8
3.	-	56650	56850	7+2x1.5+1x1=11 m	0.200	Fig 2.8
4.	-	57250	57550	7+2x1.5+1x1=11 m	0.300	Fig 2.8
5.	-	57700	57800	7+2x1.5+1x1=11 m	0.100	Fig 2.8
6.	-	57900	58300	7+2x1.5+1x1=11 m	0.400	Fig 2.8
7.	-	58750	59850	7+2x1.5+1x1=11 m	1.100	Fig 2.8
8.	-	60450	60650	7+2x1.5+1x1=11 m	0.200	Fig 2.8

9.	-	60850	61550	7+2x1.5+1x1=11 m	0.700	Fig 2.8
10.	-	61750	61900	7+2x1.5+1x1=11 m	0.150	Fig 2.8
11.	-	62050	62200	7+2x1.5+1x1=11 m	0.150	Fig 2.8
12.	-	62300	62500	7+2x1.5+1x1=11 m	0.200	Fig 2.8
13.	-	62900	63000	7+2x1.5+1x1=11 m	0.100	Fig 2.8
14.	-	63650	63950	7+2x1.5+1x1=11 m	0.300	Fig 2.8
15.	-	64350	64550	7+2x1.5+1x1=11 m	0.200	Fig 2.8
16.	-	65100	65400	7+2x1.5+1x1=11 m	0.300	Fig 2.8
17.	-	65800	66000	7+2x1.5+1x1=11 m	0.200	Fig 2.8
18.	-	66350	66450	7+2x1.5+1x1=11 m	0.100	Fig 2.8
19.	-	67000	67250	7+2x1.5+1x1=11 m	0.250	Fig 2.8
20.	-	71900	72050	7+2x1.5+1x1=11 m	0.150	Fig 2.8
21.	-	73050	73250	7+2x1.5+1x1=11 m	0.200	Fig 2.8
22.	-	73350	73550	7+2x1.5+1x1=11 m	0.200	Fig 2.8
23.	-	73700	73850	7+2x1.5+1x1=11 m	0.150	Fig 2.8
24.	-	75250	75350	7+2x1.5+1x1=11 m	0.100	Fig 2.8
25.	-	76000	76250	7+2x1.5+1x1=11 m	0.250	Fig 2.8
26.	-	76850	77200	7+2x1.5+1x1=11 m	0.350	Fig 2.8
27.	-	77350	77700	7+2x1.5+1x1=11 m	0.350	Fig 2.8
28.	-	78000	78250	7+2x1.5+1x1=11 m	0.250	Fig 2.8
29.	-	78700	78800	7+2x1.5+1x1=11 m	0.100	Fig 2.8
30.	-	79100	79450	7+2x1.5+1x1=11 m	0.350	Fig 2.8
31.	-	79650	80150	7+2x1.5+1x1=11 m	0.500	Fig 2.8
32.	-	80500	80630	7+2x1.5+1x1=11 m	0.130	Fig 2.8
		Total Length			9.130km	

c) Two Lane Road with Paved shoulders in Hilly Terrain with Hill side drain without Retaining Wall:- The Carriageway shall be 7.0 m wide with 1.5 m paved shoulder both side and 1.0 m Granular shoulder valley side shall be provided. The width of carriageway specified following table-

Sl. No.	Built-up stretch (Township)	Design Chainage		Width (m)	Length (km)	Typical cross section (Ref. to Manual)
		From	To			
1.	-	55400	55600	7+2x1.5+1x1=11 m	0.200	Fig 2.9
2.	-	57550	57700	7+2x1.5+1x1=11 m	0.150	Fig 2.9

3.	-	58300	58450	7+2x1.5+1x1=11 m	0.150	Fig 2.9
4.	-	59850	60350	7+2x1.5+1x1=11 m	0.500	Fig 2.9
5.	-	61550	61750	7+2x1.5+1x1=11 m	0.200	Fig 2.9
6.	-	62200	62300	7+2x1.5+1x1=11 m	0.100	Fig 2.9
7.	-	62500	62900	7+2x1.5+1x1=11 m	0.400	Fig 2.9
8.	-	63000	63350	7+2x1.5+1x1=11 m	0.350	Fig 2.9
9.	-	67250	67400	7+2x1.5+1x1=11 m	0.150	Fig 2.9
10.	-	68150	68300	7+2x1.5+1x1=11 m	0.150	Fig 2.9
11.	-	68550	69350	7+2x1.5+1x1=11 m	0.800	Fig 2.9
12.	-	69500	70000	7+2x1.5+1x1=11 m	0.500	Fig 2.9
13.	-	70500	71900	7+2x1.5+1x1=11 m	1.400	Fig 2.9
14.	-	72350	72500	7+2x1.5+1x1=11 m	0.150	Fig 2.9
15.	-	73250	73350	7+2x1.5+1x1=11 m	0.100	Fig 2.9
16.	-	73550	73700	7+2x1.5+1x1=11 m	0.150	Fig 2.9
17.	-	73850	74650	7+2x1.5+1x1=11 m	0.800	Fig 2.9
18.	-	74900	75250	7+2x1.5+1x1=11 m	0.350	Fig 2.9
19.	-	75500	75750	7+2x1.5+1x1=11 m	0.250	Fig 2.9
20.	-	76500	76600	7+2x1.5+1x1=11 m	0.100	Fig 2.9
21.	-	76700	76850	7+2x1.5+1x1=11 m	0.150	Fig 2.9
22.	-	77200	77350	7+2x1.5+1x1=11 m	0.150	Fig 2.9
23.	-	79000	79100	7+2x1.5+1x1=11 m	0.100	Fig 2.9
24.	-	80400	80500	7+2x1.5+1x1=11 m	0.100	Fig 2.9
Total Length					7.450km	

d) Two Lane Road with Paved shoulders in Hilly Terrain with both side Retaining Wall:- The Carriageway shall be 7.0 m wide with 1.5 m paved shoulder both side and 1.0 m Granular shoulder valley side shall be provided. The width of carriageway specified following table-

Sl. No.	Built-up stretch (Township)	Design Chainage		Width (m)	Length (km)	Typical cross section (Ref. to Manual)
		From	To			
1	-	70000	70150	7+2x1.5+2x1=12 m	0.150	Fig 2.12 (new)
2	-	74650	74900	7+2x1.5+2x1=12 m	0.250	Fig 2.12 (new)
Total Length					0.40km	

\$ The contents of this Annex-I may be modified in accordance with the structure of the Project.

1. Except as otherwise provided in this Agreement, the width of the paved carriageway and cross-sectional features shall conform to paragraph 1.1 above.

## 2 GEOMETRIC DESIGN AND GENERAL FEATURES

### (i) General

Geometric design and general features of the Project Highway shall be in accordance with Section 2 of the Manual.

### (ii) Design speed

The design speed shall be the minimum design speed of [60-40 km per hr for hilly terrain].

### (iii) Improvement of the existing road geometrics

[Refer to paragraph 2.1 (v) of the Manual and provide details]

In the following sections, where improvement of the existing road geometrics to the prescribed standards is not possible, the existing road geometrics shall be improved to the extent possible within the given right of way and proper road signs and safety measures shall be provided:

Sl. No.	Stretch		Type of deficiency (Radius)	Remarks
	From	To		
1.	54691.605	54787.207	20m	Hilly Terrain
2.	56274.826	56421.935	50m	Hilly Terrain
3.	56602.231	56698.914	20m	Hilly Terrain
4.	57208.945	57305.993	20m	Hilly Terrain
5.	57836.921	57933.810	20m	Hilly Terrain
6.	58707.852	58804.378	20m	Hilly Terrain
7.	59247.524	59394.167	50m	Hilly Terrain
8.	60136.477	60228.460	50m	Hilly Terrain
9.	60402.061	60498.567	20m	Hilly Terrain
10.	60599.974	60694.218	50m	Hilly Terrain
11.	63356.319	63498.630	50m	Hilly Terrain
12.	63596.064	63692.325	20m	Hilly Terrain
13.	63919.220	64055.126	50m	Hilly Terrain
14.	64284.943	64404.786	30m	Hilly Terrain
15.	65036.324	65153.526	30m	Hilly Terrain

16.	65706.269	65827.548	30m	Hilly Terrain
17.	66150.078	66311.453	50m	Hilly Terrain
18.	66673.073	66822.230	40m	Hilly Terrain
19.	68391.862	68488.800	20m	Hilly Terrain
20.	72001.552	72061.758	30m	Hilly Terrain
21.	74810.756	74873.431	50m	Hilly Terrain
22.	75312.715	75336.156	20m	Hilly Terrain
23.	76241.275	76300.294	30m	Hilly Terrain
24.	77703.366	77728.411	20m	Hilly Terrain
25.	78265.457	78292.334	20m	Hilly Terrain
26.	79455.415	79482.833	20m	Hilly Terrain
27.	80132.127	80159.066	20m	Hilly Terrain

**(iv) Right of Way**

[Refer to paragraph 2.3 of the Manual]. Details of the Right of Way are given in Annex II of Schedule-A.

**(v) Type of shoulders**

[Refer to paragraph 2.5.2 of the Manual and specify]

(a) In open country paved shoulder of 1.5m both side & granular shoulder of 1.0m width valley sides shall be provided (hilly terrain).

S.No.	Design Chainage		Length (km)	Paved Shoulder	Granular Shoulder	Reference to cross section
	From km	To km				
1.	54700	55400	0.700	2x1.5=3.0m	1x1=1.0m	Fig 2.8
2.	55400	55600	0.200	2x1.5=3.0m	2x1=2.0m	Fig 2.9
3.	55600	56000	0.400	2x1.5=3.0m	1x1=1.0m	Fig 2.8
4.	56650	56850	0.200	2x1.5=3.0m	1x1=1.0m	Fig 2.8
5.	57250	57550	0.300	2x1.5=3.0m	1x1=1.0m	Fig 2.8
6.	57550	57700	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.9
7.	57700	57800	0.100	2x1.5=3.0m	1x1=1.0m	Fig 2.8
8.	57900	58300	0.400	2x1.5=3.0m	1x1=1.0m	Fig 2.8
9.	58300	58450	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.9

10.	58750	59850	1.100	2x1.5=3.0m	1x1=1.0m	Fig 2.8
11.	59850	60350	0.500	2x1.5=3.0m	1x1=1.0m	Fig 2.9
12.	60450	60650	0.200	2x1.5=3.0m	1x1=1.0m	Fig 2.8
13.	60850	61550	0.700	2x1.5=3.0m	1x1=1.0m	Fig 2.8
14.	61550	61750	0.200	2x1.5=3.0m	1x1=1.0m	Fig 2.9
15.	61750	61900	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.8
16.	62050	62200	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.8
17.	62200	62300	0.100	2x1.5=3.0m	1x1=1.0m	Fig 2.9
18.	62300	62500	0.200	2x1.5=3.0m	1x1=1.0m	Fig 2.8
19.	62500	62900	0.400	2x1.5=3.0m	1x1=1.0m	Fig 2.9
20.	62900	63000	0.100	2x1.5=3.0m	1x1=1.0m	Fig 2.8
21.	63000	63350	0.350	2x1.5=3.0m	1x1=1.0m	Fig 2.9
22.	63650	63950	0.300	2x1.5=3.0m	1x1=1.0m	Fig 2.8
23.	64350	64550	0.200	2x1.5=3.0m	1x1=1.0m	Fig 2.8
24.	65100	65400	0.300	2x1.5=3.0m	1x1=1.0m	Fig 2.8
25.	65800	66000	0.200	2x1.5=3.0m	1x1=1.0m	Fig 2.8
26.	66350	66450	0.100	2x1.5=3.0m	1x1=1.0m	Fig 2.8
27.	67000	67250	0.250	2x1.5=3.0m	1x1=1.0m	Fig 2.8
28.	67250	67400	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.9
29.	68150	68300	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.9
30.	68550	69350	0.800	2x1.5=3.0m	1x1=1.0m	Fig 2.9
31.	69500	70000	0.500	2x1.5=3.0m	2x1=2.0m	Fig 2.12(new)
32.	70000	70150	0.150	2x1.5=3.0m	2x1=2.0m	Fig 2.12(new)
33.	70500	71900	1.400	2x1.5=3.0m	1x1=1.0m	Fig 2.8
34.	71900	72050	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.9
35.	72350	72500	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.9
36.	73050	73250	0.200	2x1.5=3.0m	1x1=1.0m	Fig 2.8
37.	73250	73350	0.100	2x1.5=3.0m	1x1=1.0m	Fig 2.9
38.	73350	73550	0.200	2x1.5=3.0m	1x1=1.0m	Fig 2.8
39.	73550	73700	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.9
40.	73700	73850	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.9

41.	73850	74650	0.800	2x1.5=3.0m	1x1=1.0m	Fig 2.8
42.	74650	74900	0.250	2x1.5=3.0m	1x1=1.0m	Fig 2.9
43.	74900	75250	0.350	2x1.5=3.0m	1x1=1.0m	Fig 2.8
44.	75250	75350	0.100	2x1.5=3.0m	1x1=1.0m	Fig 2.9
45.	75500	75750	0.250	2x1.5=3.0m	1x1=1.0m	Fig 2.8
46.	76000	76250	0.250	2x1.5=3.0m	1x1=1.0m	Fig 2.9
47.	76500	76600	0.100	2x1.5=3.0m	1x1=1.0m	Fig 2.8
48.	76700	76850	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.9
49.	76850	77200	0.350	2x1.5=3.0m	1x1=1.0m	Fig 2.9
50.	77200	77350	0.150	2x1.5=3.0m	1x1=1.0m	Fig 2.8
51.	77350	77700	0.350	2x1.5=3.0m	1x1=1.0m	Fig 2.9
52.	78000	78250	0.250	2x1.5=3.0m	1x1=1.0m	Fig 2.8
53.	78700	78800	0.100	2x1.5=3.0m	1x1=1.0m	Fig 2.9
54.	79000	79100	0.100	2x1.5=3.0m	1x1=1.0m	Fig 2.8
55.	79100	79450	0.350	2x1.5=3.0m	1x1=1.0m	Fig 2.9
56.	79650	80150	0.500	2x1.5=3.0m	1x1=1.0m	Fig 2.9
57.	80400	80500	0.100	2x1.5=3.0m	1x1=1.0m	Fig 2.9
58.	80500	80630	0.130	2x1.5=3.0m	1x1=1.0m	Fig 2.9
Total		=16.980km				

**(vi) Lateral and vertical clearances at underpasses**

(a) Lateral and vertical clearances at underpasses and provision of guardrails/crash barriers shall be as per paragraph 2.11 of the Manual.

(b) Lateral clearance: The width of the opening at the underpasses shall be as follows:

Sl. No.	Location (chainage) (from km to km)	Span/opening (m)	Remarks
NIL			

**(vii) Lateral and vertical clearances at overpasses**

(a) Lateral and vertical clearances at overpasses shall be as per paragraph 2.12 of the Manual.

(b) Lateral clearance: The width of the opening at the overpasses shall be as follows:

Sl. No.	Location (chainage) (from km to km)	Span/opening (m)	Remarks
NIL			

**(viii) Service roads**

Service roads shall be constructed at the locations and for the lengths indicated below:  
[Refer to paragraph 2.13 of the Manual and provide details]

Sl No.	Location of service road (from km to km)	Right hand side (RHS)/Left hand side (LHS)/ or Both sides	Length (km) of service road
NIL			

**(ix) Grade separated structures**

(a) Grade separated structures shall be provided as per paragraph 2.14 of the Manual. The requisite particulars are given below:

[Refer to paragraphs 2.14.1 of the Manual and provide details]

Sl. No.	Location of structure	Length (m)	Number and length of spans (m)	Approach gradient	Remarks, if any
NIL					

(b) In the case of grade separated structures, the type of structure and the level of the Project Highway and the cross roads shall be as follows: [Refer to paragraphs 2.14.2 of the Manual and specify the type of vehicular under pass/ overpass structure and whether the cross road is to be carried at the existing level, raised or lowered]

Sl. No.	Location	Type of structure Length (m)	Cross road at			Remarks, if any
			Existing Level	Raised Level	Lowered Level	
NIL						

**(x) Cattle and pedestrian underpass /overpass**

Cattle and pedestrian underpass/ overpass shall be constructed as follows: [Refer to paragraphs 2.14.3 of the Manual and specify the requirements of cattle and pedestrian underpass/ overpass]

Sl. No.	Location	Type of crossing
NIL		

**(xi) Typical cross-sections of the Project Highway**

<b>Des Ch From (Km)</b>	<b>Des Ch To (Km)</b>	<b>Length (km)</b>	<b>TCS type</b>	<b>Remarks</b>
54180	54700	0.520	Fig 2.11(new)	Open Country
54700	55400	0.700	Fig 2.8	Open Country
55400	55600	0.200	Fig 2.9	Open Country
55600	56000	0.400	Fig 2.8	Open Country
56000	56650	0.650	Fig 2.11(new)	Open Country
56650	56850	0.200	Fig 2.8	Open Country
56850	57250	0.400	Fig 2.11(new)	Open Country
57250	57550	0.300	Fig 2.8	Open Country
57550	57700	0.150	Fig 2.9	Open Country
57700	57800	0.100	Fig 2.8	Open Country
57800	57900	0.100	Fig 2.11(new)	Open Country
57900	58300	0.400	Fig 2.8	Open Country
58300	58450	0.150	Fig 2.9	Open Country
58450	58750	0.300	Fig 2.11(new)	Open Country
58750	59850	1.100	Fig 2.8	Open Country
59850	60350	0.500	Fig 2.9	Open Country
60350	60450	0.100	Fig 2.11(new)	Open Country
60450	60650	0.200	Fig 2.8	Open Country
60650	60850	0.200	Fig 2.11(new)	Open Country
60850	61550	0.700	Fig 2.8	Open Country
61550	61750	0.200	Fig 2.9	Open Country
61750	61900	0.150	Fig 2.8	Open Country
61900	62050	0.150	Fig 2.11(new)	Open Country
62050	62200	0.150	Fig 2.8	Open Country
62200	62300	0.100	Fig 2.9	Open Country
62300	62500	0.200	Fig 2.8	Open Country
62500	62900	0.400	Fig 2.9	Open Country
62900	63000	0.100	Fig 2.8	Open Country
63000	63350	0.350	Fig 2.9	Open Country
63350	63650	0.300	Fig 2.11(new)	Open Country
63650	63950	0.300	Fig 2.8	Open Country

63950	64350	0.400	Fig 2.11(new)	Open Country
64350	64550	0.200	Fig 2.8	Open Country
64550	65100	0.550	Fig 2.11(new)	Open Country
65100	65400	0.300	Fig 2.8	Open Country
65400	65800	0.400	Fig 2.11(new)	Open Country
65800	66000	0.200	Fig 2.8	Open Country
66000	66350	0.350	Fig 2.11(new)	Open Country
66350	66450	0.100	Fig 2.8	Open Country
66450	67000	0.550	Fig 2.11(new)	Open Country
67000	67250	0.250	Fig 2.8	Open Country
67250	67400	0.150	Fig 2.9	Open Country
67400	68150	0.750	Fig 2.11(new)	Open Country
68150	68300	0.150	Fig 2.9	Open Country
68300	68550	0.250	Fig 2.11(new)	Open Country
68550	69350	0.800	Fig 2.9	Open Country
69350	69500	0.150	Fig 2.11(new)	Open Country
69500	70000	500	Fig 2.9	Open Country
70000	70150	150	Fig 2.12 (new)	Open Country
70150	70500	350	Fig 2.11(new)	Open Country
70500	71900	1400	Fig 2.9	Open Country
71900	72050	150	Fig 2.8	Open Country
72050	72350	300	Fig 2.11(new)	Open Country
72350	72500	150	Fig 2.9	Open Country
72500	73050	550	Fig 2.11(new)	Open Country
73050	73250	200	Fig 2.8	Open Country
73250	73350	100	Fig 2.9	Open Country
73350	73550	200	Fig 2.8	Open Country
73550	73700	150	Fig 2.9	Open Country
73700	73850	150	Fig 2.8	Open Country
73850	74650	800	Fig 2.9	Open Country
74650	74900	250	Fig 2.12 (new)	Open Country

74900	75250	350	Fig 2.9	Open Country
75250	75350	100	Fig 2.8	Open Country
75350	75500	150	Fig 2.11(new)	Open Country
75500	75750	250	Fig 2.9	Open Country
75750	76000	250	Fig 2.11(new)	Open Country
76000	76250	250	Fig 2.8	Open Country
76250	76500	250	Fig 2.11(new)	Open Country
76500	76600	100	Fig 2.9	Open Country
76600	76700	100	Fig 2.11(new)	Open Country
76700	76850	150	Fig 2.9	Open Country
76850	77200	350	Fig 2.8	Open Country
77200	77350	150	Fig 2.9	Open Country
77350	77700	350	Fig 2.8	Open Country
77700	78000	300	Fig 2.11(new)	Open Country
78000	78250	250	Fig 2.8	Open Country
78250	78700	450	Fig 2.11(new)	Open Country
78700	78800	100	Fig 2.8	Open Country
78800	79000	200	Fig 2.11(new)	Open Country
79000	79100	100	Fig 2.9	Open Country
79100	79450	350	Fig 2.8	Open Country
79450	79650	200	Fig 2.11(new)	Open Country
79650	80150	500	Fig 2.8	Open Country
80150	80400	250	Fig 2.11(new)	Open Country
80400	80500	100	Fig 2.9	Open Country
80500	80630	130	Fig 2.8	Open Country
<b>Total Design Length</b>		26.45km		

### 3 INTERSECTIONS AND GRADE SEPARATORS

All intersections and grade separators shall be as per Section 3 of the Manual. Existing intersections which are deficient shall be improved to the prescribed standards.

[Refer to paragraphs 3.1.1, 3.1.2 and 3.3 of the Manual and specify the requirements. Explain where necessary with drawings/sketches/general arrangement]

Properly designed intersections shall be provided at the locations and of the types and features given in the tables below:

**(i) At-grade intersections**

Sl. No.	Location of intersection	Type of intersection	Other features
NIL			

**(ii) Grade separated intersection with/without ramps**

Sl. No.	Location	Salient features	Minimum length of viaduct to be provided	Road to be carried over/under the structures
NIL				

**4 ROAD EMBANKMENT AND CUT SECTION**

- (i) Widening and improvement of the existing road embankment/cuttings and construction of new road embankment/ cuttings shall conform to the Specifications and Standards given in section 4 of the Manual and the specified cross sectional details. Deficiencies in the plan and profile of the existing road shall be corrected.

**Note:-**

1. Disposal of extra earth obtained by cutting is sole responsibility of contractor.
2. Indicative Muck disposal sites has been given in drawing volume but actual identification & finalization of disposal site is sole responsibility of contractor. The contractor has to acquire land if it is required.

- (ii) Raising of the existing road [Refer to paragraph 4.2.2 of the Manual and specify sections to be raised]

The existing road shall be raised in the following sections:

Sl. No.	Section (from km to km)	Length	Extent of raising [Top of finished road level]
NIL			

**5 PAVEMENT DESIGN**

- (i) Pavement design shall be carried out in accordance with Section 5 of the Manual.

Homogenous Section (Km)			CBR (%)	MSA Adopted	Adopted Pavement Composition (mm)			
From	To	Length (in Km)			BC	DBM	WWM	GSB
54+180	80+630	26.45km	8	20	30	90	250	200

- (ii) Type of pavement

[Refer to paragraph 5.1 of the Manual and state specific requirement, if any, of providing cement concrete pavement.]

S.No.	Stretch		Type of Pavement
	From km	To km	
1.	54+180	80+630	Flexible Pavement

**(iii) Design requirements**

[Refer to paragraph 5.4, 5.9 and 5.10 of the Manual and specify design requirements and strategy]

(a) *Design Period and strategy*

Flexible pavement for new pavement or for widening and strengthening of the existing pavement shall be designed for a minimum design period of 20 years. Stage construction shall not be permitted.

(b) *Design Traffic*

Notwithstanding anything to the contrary contained in this Agreement or the Manual, the Contractor shall design the pavement for a design traffic of **20 million standard axles**.

**(iv) Reconstruction of stretches**

[Refer to paragraph 5.9.7 of the Manual and specify the stretches, if any, to be reconstructed.]

The following stretches of the existing road shall be reconstructed. These shall be designed as new pavement.

S.No.	Stretch		Remark
	From km	To km	
1.	54+180	80+630	

**6 ROADSIDE DRAINAGE**

Drainage system including surface and subsurface drains for the Project Highway shall be provided as per Section 6 of the Manual.

**a) Hill Side Drain & Catch water drain**

S.No.	TCS Type	Chainage prop.		Side	Length in (m)
		From	To		
1.	Fig 2.11(new)	54180	54700	Both Side	<b>1040</b>
2.	Fig 2.8	54700	55400	One Side	<b>700</b>

3.	Fig 2.9	55400	55600	One Side	<b>200</b>
4.	Fig 2.8	55600	56000	One Side	<b>400</b>
5.	Fig 2.11(new)	56000	56650	Both Side	<b>1300</b>
6.	Fig 2.8	56650	56850	One Side	<b>200</b>
7.	Fig 2.11(new)	56850	57250	Both Side	<b>800</b>
8.	Fig 2.8	57250	57550	One Side	<b>300</b>
9.	Fig 2.9	57550	57700	One Side	<b>150</b>
10.	Fig 2.8	57700	57800	One Side	<b>100</b>
11.	Fig 2.11(new)	57800	57900	Both Side	<b>200</b>
12.	Fig 2.8	57900	58300	One Side	<b>400</b>
13.	Fig 2.9	58300	58450	One Side	<b>150</b>
14.	Fig 2.11(new)	58450	58750	Both Side	<b>600</b>
15.	Fig 2.8	58750	59850	One Side	<b>1100</b>
16.	Fig 2.9	59850	60350	One Side	<b>500</b>
17.	Fig 2.11(new)	60350	60450	Both Side	<b>200</b>
18.	Fig 2.8	60450	60650	One Side	<b>200</b>
19.	Fig 2.11(new)	60650	60850	Both Side	<b>400</b>
20.	Fig 2.8	60850	61550	One Side	<b>700</b>
21.	Fig 2.9	61550	61750	One Side	<b>200</b>
22.	Fig 2.8	61750	61900	One Side	<b>150</b>
23.	Fig 2.11(new)	61900	62050	Both Side	<b>300</b>
24.	Fig 2.8	62050	62200	One Side	<b>150</b>
25.	Fig 2.9	62200	62300	One Side	<b>100</b>
26.	Fig 2.8	62300	62500	One Side	<b>200</b>
27.	Fig 2.9	62500	62900	One Side	<b>400</b>
28.	Fig 2.8	62900	63000	One Side	<b>100</b>
29.	Fig 2.9	63000	63350	One Side	<b>350</b>
30.	Fig 2.11(new)	63350	63650	Both Side	<b>600</b>
31.	Fig 2.8	63650	63950	One Side	<b>300</b>
32.	Fig 2.11(new)	63950	64350	Both Side	<b>800</b>

33.	Fig 2.8	64350	64550	One Side	<b>200</b>
34.	Fig 2.11(new)	64550	65100	Both Side	<b>1100</b>
35.	Fig 2.8	65100	65400	One Side	<b>300</b>
36.	Fig 2.11(new)	65400	65800	Both Side	<b>800</b>
37.	Fig 2.8	65800	66000	One Side	<b>200</b>
38.	Fig 2.11(new)	66000	66350	Both Side	<b>700</b>
39.	Fig 2.8	66350	66450	One Side	<b>100</b>
40.	Fig 2.11(new)	66450	67000	Both Side	<b>1100</b>
41.	Fig 2.8	67000	67250	One Side	<b>250</b>
42.	Fig 2.9	67250	67400	One Side	<b>150</b>
43.	Fig 2.11(new)	67400	68150	Both Side	<b>1500</b>
44.	Fig 2.9	68150	68300	One Side	<b>150</b>
45.	Fig 2.11(new)	68300	68550	Both Side	<b>500</b>
46.	Fig 2.9	68550	69350	One Side	<b>800</b>
47.	Fig 2.11(new)	69350	69500	Both Side	<b>300</b>
48.	Fig 2.9	69500	70000	One Side	<b>500</b>
49.	Fig 2.11(new)	70150	70500	Both Side	<b>700</b>
50.	Fig 2.9	70500	71900	One Side	<b>1400</b>
51.	Fig 2.8	71900	72050	One Side	<b>150</b>
52.	Fig 2.11(new)	72050	72350	Both Side	<b>600</b>
53.	Fig 2.9	72350	72500	One Side	<b>150</b>
54.	Fig 2.11(new)	72500	73050	Both Side	<b>1100</b>
55.	Fig 2.8	73050	73250	One Side	<b>200</b>
56.	Fig 2.9	73250	73350	One Side	<b>100</b>
57.	Fig 2.8	73350	73550	One Side	<b>200</b>
58.	Fig 2.9	73550	73700	One Side	<b>150</b>
59.	Fig 2.8	73700	73850	One Side	<b>150</b>
60.	Fig 2.9	73850	74650	One Side	<b>800</b>
61.	Fig 2.9	74900	75250	One Side	<b>350</b>
62.	Fig 2.8	75250	75350	One Side	<b>100</b>

63.	Fig 2.11(new)	75350	75500	Both Side	<b>300</b>
64.	Fig 2.9	75500	75750	One Side	<b>250</b>
65.	Fig 2.11(new)	75750	76000	Both Side	<b>500</b>
66.	Fig 2.8	76000	76250	One Side	<b>250</b>
67.	Fig 2.11(new)	76250	76500	Both Side	<b>500</b>
68.	Fig 2.9	76500	76600	One Side	<b>100</b>
69.	Fig 2.11(new)	76600	76700	Both Side	<b>200</b>
70.	Fig 2.9	76700	76850	One Side	<b>150</b>
71.	Fig 2.8	76850	77200	One Side	<b>350</b>
72.	Fig 2.9	77200	77350	One Side	<b>150</b>
73.	Fig 2.8	77350	77700	One Side	<b>350</b>
74.	Fig 2.11(new)	77700	78000	Both Side	<b>600</b>
75.	Fig 2.8	78000	78250	One Side	<b>250</b>
76.	Fig 2.11(new)	78250	78700	Both Side	<b>900</b>
77.	Fig 2.8	78700	78800	One Side	<b>100</b>
78.	Fig 2.11(new)	78800	79000	Both Side	<b>400</b>
79.	Fig 2.9	79000	79100	One Side	<b>100</b>
80.	Fig 2.8	79100	79450	One Side	<b>350</b>
81.	Fig 2.11(new)	79450	79650	Both Side	<b>400</b>
82.	Fig 2.8	79650	80150	One Side	<b>500</b>
83.	Fig 2.11(new)	80150	80400	Both Side	<b>500</b>
84.	Fig 2.9	80400	80500	One Side	<b>100</b>
85.	Fig 2.8	80500	80630	One Side	<b>130</b>
			<b>Total</b>		<b>35520 m</b>

## **7 DESIGN OF STRUCTURES**

### **(i) General**

- (a) All bridges, culverts and structures shall be designed and constructed in accordance with section 7 of the Manual and shall conform to the cross-sectional features and other details specified therein.
- (b) Width of the carriageway of new bridges and structures shall be as follows:

[Refer to paragraph 7.1 (ii) of the Manual and specify the width of carriageway of new bridges and structures of more than 60 (sixty) meter length, if the carriageway width is different from 7.5 (seven point five) meters in the table below.]

Sl No.	Bridge at km	Width of carriageway and cross-sectional features@
NIL		

- (c) The following structures shall be provided with footpaths:

[Refer to paragraph 7.1 (iii) of the Manual and provide details of new Structures with footpath.]

Sl No.	Bridge at km	Width of carriageway and cross-sectional features@
1	62550	$0.5(\text{CB})+1.5(\text{Footpath})+0.5(\text{CB})+11$ (Carriageway)+0.5(CB)+1.5(Footpath)+0.5(CB) =16m
2	67825	$0.5(\text{CB})+1.5(\text{Footpath})+0.5(\text{CB})+11$ (Carriageway)+0.5(CB)+1.5(Footpath)+0.5(CB) =16m
3	68300	$0.5(\text{CB})+1.5(\text{Footpath})+0.5(\text{CB})+11$ (Carriageway)+0.5(CB)+1.5(Footpath)+0.5(CB) =16m
4	68600	$0.5(\text{CB})+1.5(\text{Footpath})+0.5(\text{CB})+11$ (Carriageway)+0.5(CB)+1.5(Footpath)+0.5(CB) =16m
5	77520	$0.5(\text{CB})+1.5(\text{Footpath})+0.5(\text{CB})+11$ (Carriageway)+0.5(CB)+1.5(Footpath)+0.5(CB) =16m

- (d) All bridges shall be high-level bridges.

[Refer to paragraph 7.1 (iv) of the Manual and state if there is any exception]

- (e) The following structures shall be designed to carry utility services specified in table below:

[Refer to paragraph 7.1 (viii) of the Manual and provide details]

Sl. No.	Bridge at km	Utility service to be carried	Remarks
NIL			

- (f) Cross-section of the new culverts and bridges at deck level for the Project Highway shall conform to the typical cross-sections given in section 7 of the Manual.

**(ii) Culverts**

(a) Overall width of all culverts shall be equal to the roadway width of the approaches.

(b) *Reconstruction of existing culverts:*

The existing culverts at the following locations shall be re-constructed as new culverts:

[Refer to paragraph 7.3 (i) of the Manual and provide details]

Hume Pipe Culvert – NIL

Sl. No.	Culvert Location	Span/Opening (m)	Remarks, if any*
NIL			

Slab Culvert – NIL

Sl. No.	Culvert Location	Span/Opening (m)	Remarks, if any*
NIL			

Box Culvert – NIL

Sl. No.	Culvert Location	Span/Opening (m)	Remarks, if any*
NIL			

\*[Specify modifications, if any, required in the road level, etc.]

(c) *Widening of existing culverts*

All existing culverts which are not to be reconstructed shall be widened to the roadway width of the Project Highway as per the typical cross section given in section 7 of the Manual. Repairs and strengthening of existing structures where required shall be carried out.

Sl. No.	Culvert Location	Type, span, height and width of existing culvert (m)	Repairs to be carried out [specify]
NIL			

(d) Additional new culverts shall be constructed as per particulars given in the table below:

Hume Pipe Culvert –00 Nos.

Sl No.	Culvert Location	Span/Opening (m)
NIL		

Slab Culvert –00

Sl No.	Culvert Location	Span/Opening (m)
NIL		

**Box Culvert – 104Nos.**

<b>Sl No.</b>	<b>Culvert Location</b>	<b>Span/Opening (m)</b>
1.	54200	1x2x2
2.	54380	1x2x2
3.	54600	1x2x2
4.	54895	1x2x2
5.	55080	1x2x2
6.	55245	1x2x2
7.	55420	1x2x2
8.	55730	1x2x2
9.	56045	1x3x3
10.	56400	1x2x2
11.	56550	1x2x2
12.	56755	1x2x2
13.	56950	1x2x2
14.	57150	1x2x2
15.	57350	1x2x2
16.	57710	1x2x2
17.	58090	1x2x2
18.	58650	1x2x2
19.	58860	1x2x2
20.	59180	1x2x2
21.	59550	1x2x2
22.	59825	1x2x2
23.	60000	1x2x2
24.	60175	1x2x2
25.	60650	1x3x3
26.	60925	1x3x3
27.	61120	1x3x3
28.	61515	1x3x3
29.	61875	1x3x3
30.	62185	1x3x3
31.	62860	1x2x2

32.	63050	1x2x2
33.	63310	1x2x2
34.	65550	1x2x2
35.	63740	1x2x2
36.	63900	1x2x2
37.	64190	1x2x2
38.	64500	1x2x2
39.	64735	1x2x2
40.	65020	1x2x2
41.	65160	1x2x2
42.	65380	1x2x2
43.	65550	1x2x2
44.	65695	1x2x2
45.	65850	1x3x3
46.	65980	1x3x3
47.	66300	1x2x2
48.	66475	1x2x2
49.	66610	1x2x2
50.	66880	1x2x2
51.	67000	1x2x2
52.	67200	1x2x2
53.	67430	1x3x3
54.	67650	1x3x3
55.	68040	1x3x3
56.	68760	1x2x2
57.	68975	1x2x2
58.	69250	1x2x2
59.	69450	1x2x2
60.	69555	1x2x2
61.	69760	1x2x2
62.	69920	1x2x2
63.	70380	1x3x3
64.	70600	1x3x3

65.	70930	1x3x3
66.	71250	1x3x3
67.	71520	1x2x2
68.	71900	1x2x2
69.	72165	1x2x2
70.	72450	2x2x2
71.	72660	1x2x2
72.	72920	2x2x2
73.	73260	2x2x2
74.	73460	1x2x2
75.	73665	1x2x2
76.	73875	1x2x2
77.	74150	1x2x2
78.	74420	1x2x2
79.	74725	1x3x3
80.	74980	1x2x2
81.	75225	1x2x2
82.	75430	1x2x2
83.	75560	1x2x2
84.	75800	1x2x2
85.	76000	1x2x2
86.	76150	1x2x2
87.	76390	1x2x2
88.	76540	2x2x2
89.	76770	1x3x3
90.	77030	2x2x2
91.	77310	2x2x2
92.	77660	1x3x3
93.	78230	1x3x3
94.	78325	1x2x2
95.	78700	1x3x3
96.	79100	1x3x3
97.	79245	1x3x3

98.	79370	1x2x2
99.	79570	1x2x2
100.	79735	1x3x3
101.	79855	1x3x3
102.	80030	1x3x3
103.	80260	1x3x3
104.	80530	1x3x3

- (e) Repairs/replacements of railing/parapets, flooring and protection works of the existing culverts shall be undertaken as follows:

Sl. No.	Location at km	Type of repair required
NIL		

- (f) Floor protection works shall be as specified in the relevant IRC Codes and Specifications.

**(iii) Bridges**

- (a) *Existing bridges to be re-constructed/widened*

[(i) The existing bridges at the following locations shall be re-constructed as new Structures:]

[Refer to paragraph 7.3.2 of the Manual and provide details]

- (a) Major Bridge – NIL

Sl. No.	Bridge location (km)	Salient details of existing bridge	Adequacy or otherwise of the existing waterway, vertical clearance, etc*	Remarks
NIL				

- (b) Minor Bridge – 00 Nos.

Sl. No.	Bridge location (km)	Salient details of existing bridge	Adequacy or otherwise of the existing waterway, vertical clearance, etc*	Remarks
NIL				

\*Attach GAD

- (ii) The following narrow bridges shall be widened:

Sl. No.	Location (km)	Existing width (m)	Extent of widening (m)	Cross-section at deck level for widening @
NIL				

@ Attach cross-section

(b) *Additional new bridges*

New bridges at the following locations on the Project Highway shall be constructed. GADs for the new bridges are attached in the drawings folder.

(a) Minor Bridge - 01Nos.

Sl. No.	Location (km)	Span Arrangements	Proposed Width	Remarks, if any
1	62550	2x4x4	As per Manual	-
2	67825	2x4x4	As per Manual	-
3	68300	2x4x4	As per Manual	-
4	68600	2x4x4	As per Manual	-
5	77520	2x4x4	16m	-

(b) Major Bridge - 01 Nos.

Sl. No.	Location (km)	Span Arrangements	Proposed Width	Remarks, if any
1	70+120	3x25m	16m	RCC T Beam Girder

(c) The railings of existing bridges shall be replaced by crash barriers at the following locations:

[Refer to paragraph 7.18 (iv) the Manual and provide details:]

Sl. No.	Location at km	Remarks
NIL		

(d) Repairs/replacements of railing/parapets of the existing bridges shall be undertaken as follows:

Sl. No.	Location at km	Remarks
NIL		

(e) *Drainage system for bridge decks*

An effective drainage system for bridge decks shall be provided as specified in paragraph 7.21 of the Manual

(f) *Structures in marine environment*

[Refer to paragraph 7.22 of the Manual and specify the necessary measures / treatments for protecting structures in marine environment, where applicable]

(iv) **Rail-road bridges**

(a) Design, construction and detailing of ROB/RUB shall be as specified in section 7 of the Manual. [Refer to paragraph 7.19 of the Manual and specify modification, if any]

(b) *Road over-bridges*

Road over-bridges (road over rail) shall be provided at the following level crossings, as per GAD drawings attached:

Sl. No.	Location of Level crossing (chainage km)	Length of bridge (m)
NIL		

(c) *Road under-bridges*

Road under-bridges (road under railway line) shall be provided at the following level crossings, as per GAD drawings attached:

Sl. No.	Location of Level crossing (chainage km)	Number and length of span (m)
NIL		

**(v) Grade separated structures**

[Refer to paragraph 7.20 of the Manual]

The grade separated structures shall be provided at the locations and of the type and length specified in paragraphs 2.9 and 3 of this Annex-I.

**(vi) Repairs and strengthening of bridges and structures**

[Refer to paragraph 7.23 of the Manual and provide details]

The existing bridges and structures to be repaired/strengthened, and the nature and extent of repairs /strengthening required are given below:

**A. Bridges**

Sl. No.	Location of bridge (km)	Nature and extent of repairs /strengthening to be carried out
NIL		

**B. ROB / RUB**

Sl. No.	Location of ROB/RUB (km)	Nature and extent of repairs /strengthening to be carried out
NIL		

**C. Overpasses/Underpasses and other structures**

Sl. No.	Location of Structure (km)	Nature and extent of repairs /strengthening to be carried out
NIL		

**(vii) List of Major Bridges and Structures**

The following is the list of the Major Bridges and Structures:

Sl. No.	Location
NIL	

**8 TRAFFIC CONTROL DEVICES AND ROAD SAFETY WORKS**

- (i) Traffic control devices and road safety works shall be provided in accordance with Section 9 of the Manual.
- (ii) Specifications of the reflective sheeting. [Refer to paragraph 9.3 of the Manual and specify]

**9. Roadside Furniture**

- (i) Roadside furniture shall be provided in accordance with the provisions of Section 11 of the Manual.
- (ii) Overhead traffic signs: As per paragraph 11.5 of the Manual

**10 COMPULSORY AFFORESTATION**

[Refer to paragraph 12.1 of the Manual and specify the number of trees which are required to be planted by the Contractor as compensatory a forestation.]

**11 HAZARDOUS LOCATIONS**

The crash barriers shall also be provided at the following hazardous locations:

S.No.	TCS Type	Chainage prop.		Side	Length in (m)
		From	To		
1.	Fig 2.8	54700	55400	One Side	<b>700</b>
2.	Fig 2.9	55400	55600	One Side	<b>200</b>
3.	Fig 2.8	55600	56000	One Side	<b>400</b>
4.	Fig 2.8	56650	56850	One Side	<b>200</b>
5.	Fig 2.8	57250	57550	One Side	<b>300</b>
6.	Fig 2.9	57550	57700	One Side	<b>150</b>
7.	Fig 2.8	57700	57800	One Side	<b>100</b>
8.	Fig 2.8	57900	58300	One Side	<b>400</b>
9.	Fig 2.9	58300	58450	One Side	<b>150</b>
10.	Fig 2.8	58750	59850	One Side	<b>1100</b>
11.	Fig 2.9	59850	60350	One Side	<b>500</b>

12.	Fig 2.8	60450	60650	One Side	<b>200</b>
13.	Fig 2.8	60850	61550	One Side	<b>700</b>
14.	Fig 2.9	61550	61750	One Side	<b>200</b>
15.	Fig 2.8	61750	61900	One Side	<b>150</b>
16.	Fig 2.8	62050	62200	One Side	<b>150</b>
17.	Fig 2.9	62200	62300	One Side	<b>100</b>
18.	Fig 2.8	62300	62500	One Side	<b>200</b>
19.	Fig 2.9	62500	62900	One Side	<b>400</b>
20.	Fig 2.8	62900	63000	One Side	<b>100</b>
21.	Fig 2.9	63000	63350	One Side	<b>350</b>
22.	Fig 2.8	63650	63950	One Side	<b>300</b>
23.	Fig 2.8	64350	64550	One Side	<b>200</b>
24.	Fig 2.8	65100	65400	One Side	<b>300</b>
25.	Fig 2.8	65800	66000	One Side	<b>200</b>
26.	Fig 2.8	66350	66450	One Side	<b>100</b>
27.	Fig 2.8	67000	67250	One Side	<b>250</b>
28.	Fig 2.9	67250	67400	One Side	<b>150</b>
29.	Fig 2.9	68150	68300	One Side	<b>150</b>
30.	Fig 2.9	68550	69350	One Side	<b>800</b>
31.	Fig 2.9	69500	70000	One Side	<b>500</b>
32.	Fig 2.12 (new)	70000	70150	Both Side	<b>300</b>
33.	Fig 2.9	70500	71900	One Side	<b>1400</b>
34.	Fig 2.8	71900	72050	One Side	<b>150</b>
35.	Fig 2.9	72350	72500	One Side	<b>150</b>
36.	Fig 2.8	73050	73250	One Side	<b>200</b>
37.	Fig 2.9	73250	73350	One Side	<b>100</b>
38.	Fig 2.8	73350	73550	One Side	<b>200</b>
39.	Fig 2.9	73550	73700	One Side	<b>150</b>
40.	Fig 2.8	73700	73850	One Side	<b>150</b>
41.	Fig 2.9	73850	74650	One Side	<b>800</b>

42.	Fig 2.12 (new)	74650	74900	Both Side	<b>500</b>
43.	Fig 2.9	74900	75250	One Side	<b>350</b>
44.	Fig 2.8	75250	75350	One Side	<b>100</b>
45.	Fig 2.9	75500	75750	One Side	<b>250</b>
46.	Fig 2.8	76000	76250	One Side	<b>250</b>
47.	Fig 2.9	76500	76600	One Side	<b>100</b>
48.	Fig 2.9	76700	76850	One Side	<b>150</b>
49.	Fig 2.8	76850	77200	One Side	<b>350</b>
50.	Fig 2.9	77200	77350	One Side	<b>150</b>
51.	Fig 2.8	77350	77700	One Side	<b>350</b>
52.	Fig 2.8	78000	78250	One Side	<b>250</b>
53.	Fig 2.8	78700	78800	One Side	<b>100</b>
54.	Fig 2.9	79000	79100	One Side	<b>100</b>
55.	Fig 2.8	79100	79450	One Side	<b>350</b>
56.	Fig 2.8	79650	80150	One Side	<b>500</b>
57.	Fig 2.9	80400	80500	One Side	<b>100</b>
58.	Fig 2.8	80500	80630	One Side	<b>130</b>
			<b>Total</b>		<b>17380 m</b>

## 12 SPECIAL REQUIREMENT FOR HILL ROADS

[Refer to paragraphs 14.5 and 14.8 of the Manual and provide details where relevant and required.]

Special requirement for hill roads in accordance with the provisions of section 14 of the manual shall be provided in the following locations:-

### a) Retaining Wall

S.No.	Design Chainage (In km.)		Length (m)	Remarks
	From	To		
1.	54700	55400	700	Hilly portion. Retaining wall shall be designed and provided as per the technical
2.	55600	56000	400	
3.	56650	56850	200	

4.	57250	57550	300	requirement in consultation with the Authority Engineer subject to minimum length of 9930 meter.	
5.	57700	57800	100		
6.	57900	58300	400		
7.	58750	59850	1100		
8.	60450	60650	200		
9.	60850	61550	700		
10.	61750	61900	150		
11.	62050	62200	150		
12.	62300	62500	200		
13.	62900	63000	100		
14.	63650	63950	300		
15.	64350	64550	200		
16.	65100	65400	300		
17.	65800	66000	200		
18.	66350	66450	100		
19.	67000	67250	250		
20.	70000	70150	300		
21.	71900	72050	150		
22.	73050	73250	200		
23.	73350	73550	200		
24.	73700	73850	150		
25.	74650	74900	500		
26.	75250	75350	100		
27.	76000	76250	250		
28.	76850	77200	350		
29.	77350	77700	350		
30.	78000	78250	250		
31.	78700	78800	100		
32.	79100	79450	350		
33.	79650	80150	500		
34.	80500	80630	130		
		<b>Total</b>	<b>9930</b>		

b) Breast wall

S.No.	Des. Chainage		Length in (m)	Remarks
	From	To		
1.	54180	54700	520	
2.	55000	56250	1250	
3.	56950	57250	300	
4.	57800	57850	50	
5.	58400	58750	350	
6.	60300	60400	100	
7.	61250	61400	150	

8.	61550	61750	200	Hilly portion. Breast wall shall be designed and provided as per the technical requirement in consultation with the Authority Engineer subject to minimum length of 7800 meter.	
9.	61850	62300	450		
10.	63350	63650	300		
11.	64100	64350	250		
12.	66450	66700	250		
13.	67750	68100	350		
14.	70200	70450	250		
15.	72100	72350	250		
16.	72800	73050	250		
17.	73300	73400	100		
18.	73600	73700	100		
19.	74950	75100	150		
20.	75350	75500	150		
21.	75850	76000	150		
22.	76250	76500	250		
23.	77200	77300	100		
24.	77750	77900	150		
25.	78300	78700	400		
26.	78800	79150	350		
27.	79500	79650	150		
28.	80150	80630	480		
		<b>Total</b>	<b>7800m</b>		

c) Gabian Structure

S.No.	Des. Chainage		Length in (m)	Remarks
	From	To		
1.	56250	56650	400	
2.	56800	56950	150	
3.	57500	57800	300	
4.	58250	58400	150	
5.	58950	59100	150	
6.	59300	59450	150	
7.	59800	60300	500	
8.	60800	61250	450	

9.	62300	62500	200	<p>Hilly portion. Gabion shall be designed and provided as per the technical requirement in consultation with the Authority Engineer subject to minimum length of 7100 meter.</p>
10.	63100	63350	250	
11.	64700	65100	400	
12.	65400	65600	200	
13.	65700	65800	100	
14.	66000	66350	350	
15.	67400	67750	350	
16.	70600	71500	900	
17.	72500	72800	300	
18.	73900	74600	700	
19.	75100	75250	150	
20.	75750	75850	100	
21.	77000	77200	200	
22.	77900	78100	200	
23.	78700	78800	100	
24.	79650	80000	350	
		<b>Total</b>	<b>7100m</b>	

d) Seeding & Mulching

S.No.	Des. Chainage		Length in (m)	Remarks
	From	To		
1.	54180	54700	520	Hilly portion.
2.	55000	56250	1250	
3.	56950	57250	300	
4.	57800	57850	50	
5.	58400	58750	350	
6.	60300	60400	100	
7.	61250	61400	150	
8.	61550	61750	200	
9.	61850	62300	450	
10.	63350	63650	300	
11.	64100	64350	250	
12.	66450	66700	250	

13.	67750	68100	350	Hydroseeding shall be designed and provided as per the technical requirement in consultation with the Authority Engineer subject to minimum length of 7800 meter.
14.	70200	70450	250	
15.	72100	72350	250	
16.	72800	73050	250	
17.	73300	73400	100	
18.	73600	73700	100	
19.	74950	75100	150	
20.	75350	75500	150	
21.	75850	76000	150	
22.	76250	76500	250	
23.	77200	77300	100	
24.	77750	77900	150	
25.	78300	78700	400	
26.	78800	79150	350	
27.	79500	79650	150	
28.	80150	80630	480	
		<b>Total</b>	<b>7800m</b>	

### 13 CHANGE OF SCOPE

The length of Structures and bridges specified hereinabove shall be treated as an approximate assessment. The actual lengths as required on the basis of detailed investigations shall be determined by the Contractor in accordance with the Specifications and Standards. Any variations in the lengths specified in this Schedule-B shall not constitute a Change of Scope, save and except any variations in the length arising out of a Change of Scope expressly undertaken in accordance with the provisions of Article 13.

SCHEDULE - C  
(See Clause 2.1)

**PROJECT FACILITIES**

**1 Project Facilities**

The Contractor shall construct the Project Facilities in accordance with the provisions of this Agreement. Such Project Facilities shall include:

- (a) toll plaza[s];
- (b) roadside furniture;
- (c) pedestrian facilities;
- (c) tree plantation;
- (e) truck lay-byes;
- (d) bus-bays and bus shelters;
- (h) rest areas; and
- (i) others to be specified

**2 Description of Project Facilities**

<b>S. No.</b>	<b>Project Facility</b>	<b>Location</b>	<b>Design Requirement</b>	<b>Other essential details</b>
1	Truck Lay Bay & Rest Area	Makru River	71+100	-

Note: Provide adequate details of each Project Facility to ensure their design and completion in accordance with the project-specific requirements and the provisions of the Manual.

SCHEDULE – D  
*(See Clause 2.1)*

**SPECIFICATIONS AND STANDARDS**

**1 Construction**

The Contractor shall comply with the Specifications and Standards set forth in Annex-I of this Schedule-D for construction of the Project Highway.

**2 Design Standards**

The Project Highway including Project Facilities shall conform to design requirements set out in the following documents:

[Manual of Specifications and Standards for Two Laning of Highways (IRC: SP: 73), referred to herein as the Manual]

[Note: Specify the relevant Manual, Specifications and Standards]

Annex - I  
(Schedule-D)

**Specifications and Standards for Construction**

**1 Specifications and Standards**

All Materials, works and construction operations shall conform to the Manual of Specifications and Standards for Two-Laning of Highways (IRC:SP:73-2018), referred to as the Manual, and MORTH Specifications for Road and Bridge Works. Where the specification for a work is not given, Good Industry Practice shall be adopted to the satisfaction of the Authority's Engineer.

**2 Deviations from the Specifications and Standards**

- (i) The terms "Concessionaire", "Independent Engineer" and "Concession Agreement" used in the Manual shall be deemed to be substituted by the terms "Contractor", "Authority's Engineer" and "Agreement" respectively.
- (ii) [Notwithstanding anything to the contrary contained in Paragraph 1 above, the following Specifications and Standards shall apply to the Project Highway, and for purposes of this Agreement, the aforesaid Specifications and Standards shall be deemed to be amended to the extent set forth below:]
- (iii) [Note 1: Deviations from the aforesaid Specifications and Standards shall be listed out here. Such deviations shall be specified only if they are considered essential in view of project-specific requirements.]

Sr. No.	Cl. No.	Provisions in Clause	Deviation from Manual
1	TCS-2.11 (New)	New Typical Cross Section	Two-Lane with with paved shoulder in Hilly Terrain with Hill side Drain on Both sides in open Country area (Box cut)
2	TCS-2.12 (New)	New Typical Cross Section	Two-Lane with with paved shoulder in Hilly Terrain with Retaining Wall Both sides in open Country area


**With Reference to clause no. 2.9.4 of IRC SP 73-2018, Radius of horizontal curve is restricted at locations listed below:-**

Sl. No.	Stretch		Type of deficiency (Radius)	Remarks
	From	To		
1.	54691.605	54787.207	20	Hilly Terrain
2.	56274.826	56421.935	50	Hilly Terrain
3.	56602.231	56698.914	20	Hilly Terrain
4.	57208.945	57305.993	20	Hilly Terrain
5.	57836.921	57933.810	20	Hilly Terrain


<b>6.</b>	58707.852	58804.378	20	Hilly Terrain
<b>7.</b>	59247.524	59394.167	50	Hilly Terrain
<b>8.</b>	60136.477	60228.460	50	Hilly Terrain
<b>9.</b>	60402.061	60498.567	20	Hilly Terrain
<b>10.</b>	60599.974	60694.218	50	Hilly Terrain
<b>11.</b>	63356.319	63498.630	50	Hilly Terrain
<b>12.</b>	63596.064	63692.325	20	Hilly Terrain
<b>13.</b>	63919.220	64055.126	50	Hilly Terrain
<b>14.</b>	64284.943	64404.786	30	Hilly Terrain
<b>15.</b>	65036.324	65153.526	30	Hilly Terrain
<b>16.</b>	65706.269	65827.548	30	Hilly Terrain
<b>17.</b>	66150.078	66311.453	50	Hilly Terrain
<b>18.</b>	66673.073	66822.230	40	Hilly Terrain
<b>19.</b>	68391.862	68488.800	20	Hilly Terrain
<b>20.</b>	72001.552	72061.758	30m	Hilly Terrain
<b>21.</b>	74810.756	74873.431	50m	Hilly Terrain
<b>22.</b>	75312.715	75336.156	20m	Hilly Terrain
<b>23.</b>	76241.275	76300.294	30m	Hilly Terrain
<b>24.</b>	77703.366	77728.411	20m	Hilly Terrain
<b>25.</b>	78265.457	78292.334	20m	Hilly Terrain
<b>26.</b>	79455.415	79482.833	20m	Hilly Terrain
<b>27.</b>	80132.127	80159.066	20m	Hilly Terrain

**Appendix D-I**


# Typical Cross Sections

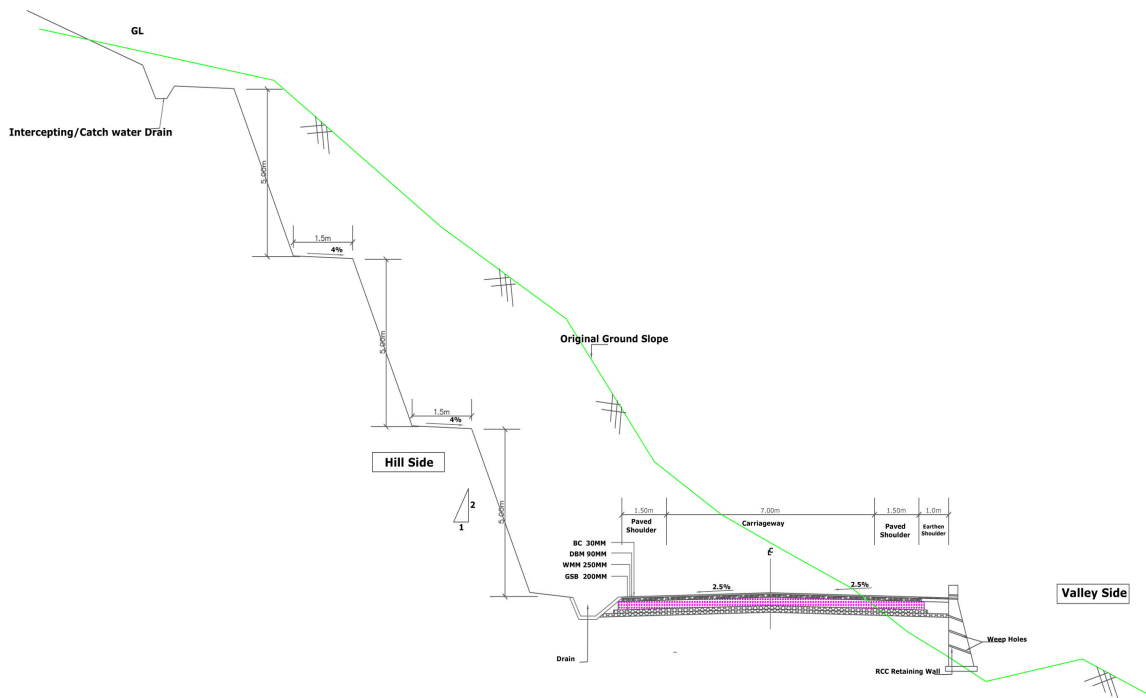


**Fig - 2.8**  
**Typical Cross Section**  
**2- lane Carriageway With One Side Retaining Wall**  
**(Open Country - Mountainous Terrain)**

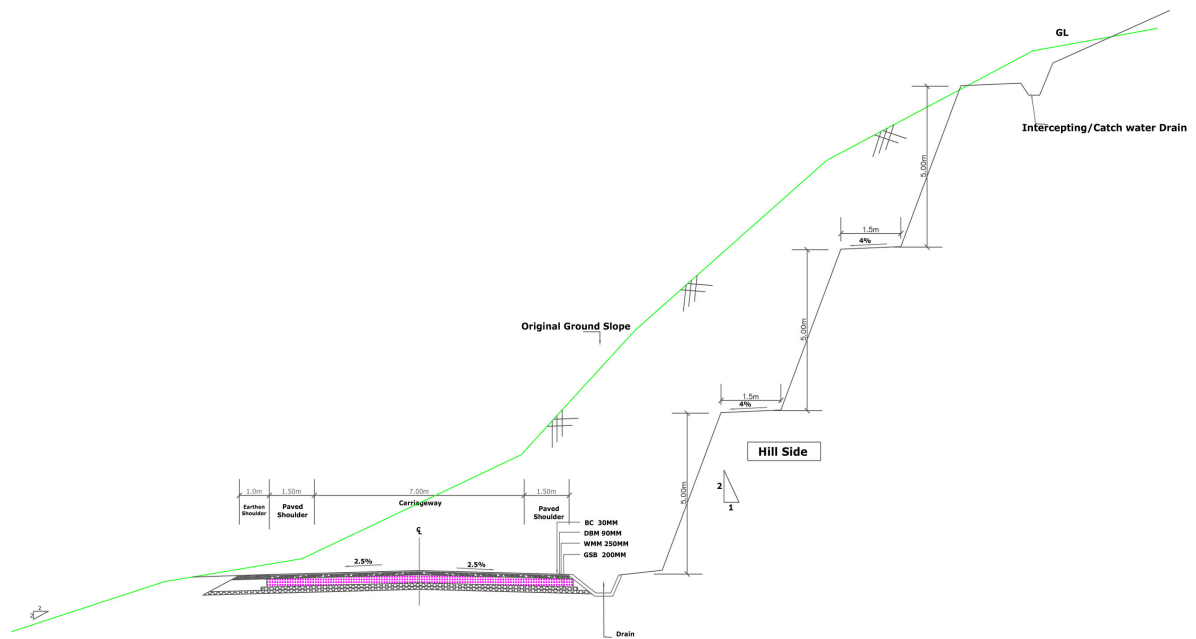

**Fig - 2.9**  
**Typical Cross Section**  
**2- lane Carriageway Without Retaining Wall**  
**(Open Country - Mountainous Terrain)**

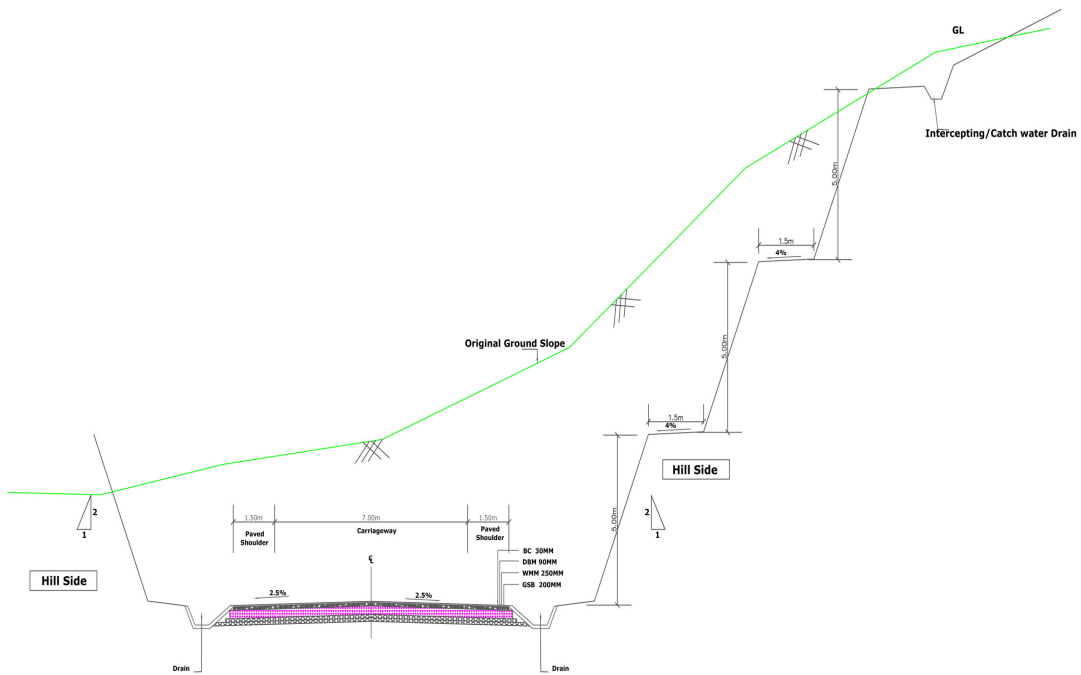

**Fig - 2.11(new)**  
**(Hilly Terrain) Typical Cross Section**  
**2- lane Carriageway With Paved Shoulders**  
**(Through Cut) Hill Section**

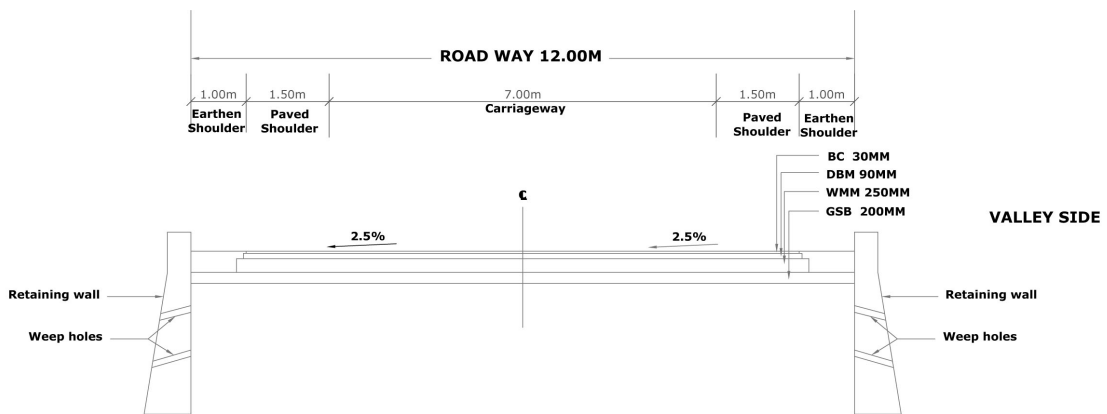

**Fig - 2.12 (new)**  
**Typical Cross Section (Hilly Terrain)**  
**2- lane carriageway (With Paved Shoulder)**  
**(With Retaining Wall on both Side)**

SCHEDULE - E  
(See Clauses 2.1 and 14.2)

**MAINTENANCE REQUIREMENTS**

**1 Maintenance Requirements**

- (i) The Contractor shall, at all times maintain the Project Highway in accordance with the provisions of this Agreement, Applicable Laws and Applicable Permits.
- (ii) The Contractor shall repair or rectify any Defect or deficiency set forth in Paragraph 2 of this Schedule-E within the time limit specified therein and any failure in this behalf shall constitute non-fulfillment of the Maintenance obligations by the Contractor. Upon occurrence of any breach hereunder, the Authority shall be entitled to effect reduction in monthly lump sum payment as set forth in Clause 14.6 of this Agreement, without prejudice to the rights of the Authority under this Agreement, including Termination thereof.
- (iii) All Materials, works and construction operations shall conform to the MORTH Specifications for Road and Bridge Works, and the relevant IRC publications. Where the specifications for a work are not given, Good Industry Practice shall be adopted.

[Specify all the relevant documents]

**2. Repair/rectification of Defects and deficiencies**

The obligations of the Contractor in respect of Maintenance Requirements shall include repair and rectification of the Defects and deficiencies specified in Annex - I of this Schedule-E within the time limit set forth therein.

**3. Other Defects and deficiencies**

In respect of any Defect or deficiency not specified in Annex - I of this Schedule-E, the Authority's Engineer may, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards, and any deviation or deterioration beyond the permissible limit shall be repaired or rectified by the Contractor within the time limit specified by the Authority's Engineer.

**4. Extension of time limit**

Notwithstanding anything to the contrary specified in this Schedule-E, if the nature and extent of any Defect or deficiency justifies more time for its repair or rectification than the time specified herein, the Contractor shall be entitled to additional time in conformity with Good Industry Practice. Such additional time shall be determined by the Authority's Engineer and conveyed to the Contractor and the Authority with

reasons thereof.

**5. Emergency repairs/restoration**

Notwithstanding anything to the contrary contained in this Schedule-E, if any Defect, deficiency or deterioration in the Project Highway poses a hazard to safety or risk of damage to property, the Contractor shall promptly take all reasonable measures for eliminating or minimizing such danger.

**6. Daily inspection by the Contractor**

The Contractor shall, through its engineer, undertake a daily visual inspection of the Project Highway and maintain a record thereof in a register to be kept in such form and manner as the Authority's Engineer may specify. Such record shall be kept in safe custody of the Contractor and shall be open to inspection by the Authority and the Authority's Engineer at any time during office hours.

**7. Pre-monsoon inspection / Post-monsoon inspection**

The Contractor shall carry out a detailed pre-monsoon inspection of all bridges, culverts and drainage system before [1st June] every year in accordance with the guidelines contained in IRC: SP35. Report of this inspection together with details of proposed maintenance works as required on the basis of this inspection shall be sent to the Authority's Engineer before the [10th June] every year. The Contractor shall complete the required repairs before the onset of the monsoon and send to the Authority's Engineer a compliance report. Post monsoon inspection shall be done by the [30th September] and the inspection report together with details of any damages observed and proposed action to remedy the same shall be sent to the Authority's Engineer.

**8. Repairs on account of natural calamities**

All damages occurring to the Project Highway on account of a Force Majeure Event or default or neglect of the Authority shall be undertaken by the Authority at its own cost. The Authority may instruct the Contractor to undertake the repairs at the rates agreed between the Parties.

Asset Type	Performance Parameter	Level of Service (LOS)		Frequency of Inspection	Tools/Equipment	Standards and References for Inspection and Data Analysis	Time limit for Rectification/Repair	Maintenance Specifications
		Desirable	Acceptable					
<b>Flexible Pavement (Pavement of MCW, Service Road, approaches of Grade structure, approaches of connecting roads, slip roads, lay byes etc. as applicable)</b>	Potholes	Nil	< 0.1 % of area and subject to limit of 10 mm indepth	Daily	Length Measurement Unit like Scale, Tape, odometer etc.	IRC 82: 2015 and Distress Identification Manual for Long Term Pavement Performance Program, FHWA 2003 ( <a href="http://www.tfhrc.com/pavement/ltp/reports/03031/">http://www.tfhrc.com/pavement/ltp/reports/03031/</a> )	24-48 hours	MORT&H Specification 3004.2
	Cracking	Nil	< 5 % subject to limit of 0.5 sqm for any 50 m length	Daily			7-15 days	MORT&H Specification 3004.3
	Rutting	Nil	< 5 mm	Daily	Straight Edge		15 -30 days	MORT&H Specification 3004.2
	Corrugations and Shoving	Nil	< 0.1 % of area	Daily	Length Measurement Unit like		2-7 days	IRC:82- 2015
	Bleeding	Nil	< 0.1 % of area	Daily	Scale, Tape, odometer etc.		3-7 days	MORT&H Specification 3004.4
	Raveling / Stripping	Nil	< 0.1 % of area	Daily			7-15 days	IRC:82- 2015 read with IRC SP 81
	Edge Deformation/ Breaking	Nil	< 1 m for any 100 m section and width < 0.1 m at any location, restricted to 30 cm from the edge	Daily	Scale, Tape, odometer etc.			IRC:82- 2015
	Roughness BI	2000 mm/km	2400 mm/km	Bi-Annually	Class I Profilometer	Class I Profilometer : ASTM E950 (98) :2004 –Standard Test Method for measuring Longitudinal Profile of	180 days	IRC:82-2015
	Skid Number	60SN	50SN	Bi-	SCRIM		180 days	BS: 7941-1: 2006

				Annually	(Sideway-force Coefficient Routine Investigation Machine or equivalent)	Travelled Surfaces with Accelerometer Established Inertial Profiling Reference ASTM E1656 -94: 2000- Standard Guide for Classification of Automatic Pavement Condition Survey Equipment		
	Pavement Condition Index	3	2.1	Bi-Annually			180 days	IRC:82- 2015
	Other Pavement Distresses			Bi-Annually			2-7 days	IRC:82- 2015
	Deflection/ Remaining Life			Annually	Falling Weight Deflect meter	IRC 115: 2014	180 days	IRC:115-2014
Rigid Pavement (Pavement of MCW, Service Road, Grade Structure, approaches of connecting roads, slip roads, lay byes etc. as applicable)	Roughness BI	2200m m/km	2400mm /km	Bi-Annually	Class I Profilometer	ASTM E950 (98) :2004 and ASTM E1656 - 94: 2000	180 days	IRC:SP:83-2008
	Skid	Skid Resistance no. at different speed of vehicles		Bi-Annually	SCRIM  (Sideway-force Coefficient Routine Investigation Machine or equivalent)	RC:SP:83-2008	180 days	IRC:SP:83-2008
		<b>Minimum SN</b>	<b>Traffic Speed (Km/h)</b>					
		36	50					
		33	65					
		32	80					
		31	95					
		31	110					

Embankment/ Slope	Edge drop at shoulders	Nil	40 mm	Daily	Length Measurement Unit like Scale, Tape, odometer etc.	IRC	7-15 days	MORT&H Specification 408.4
	Slope of camber/cross fall	Nil	<2% variation in prescribed slope of camber /cross fall	Daily			7-15 days	MORT&H Specification 408.4
	Embankment Slopes	Nil	<15 % variation in prescribe side slope	Daily			7-15 days	MORT&H Specification 408.4
	Embankment Protection	Nil	Nil	Daily	NA		7-15 days	MORT&H Specification
	Rain Cuts/ Gullies in slope	Nil	Nil	Daily Specially During Rainy Season	NA		7-15 days	MORT&H Specification

In addition to the above performance criterion, the contractor shall strictly maintain the rigid pavements as per requirements in the following table

**Table -2: Maintenance Criteria for Rigid Pavements:**

S.No	Type of Distress	Measured Parameter	Degree of Severity	Assessment Rating	Repair Action	
					For the case $d < D/2$ Short Term	For the case $d > D/2$ Long Term
<b>CRACKING</b>						
1.	Single Discrete Cracks Not intersecting with any joint	w = width of crack L = length of crack d = depth of crack D = depth of slab	0 1 2	Nil, not discernible w < 0.2 mm. hair cracks w = 0.2 - 0.5 mm, discernible from slow-moving car	No Action	Not applicable
			3	w = 0.5 - 1.5 mm, discernible from fast-moving car	Seal without delay	Seal, and stitch if L > 1m. Within 7days
			4	w = 1.5 - 3.0 mm	Seal, and stitch if L > 1 m.	Staple or Dowel Bar Retrofit, FDR for affected portion.
			5	w > 3 mm.	Within 7 days	Within 15days
2.	Single Transverse (or Diagonal) Crack intersecting with one or more joints	w = width of crack L = length of crack d = depth of crack D = depth of slab	0 1 2 3 4	Nil, not discernible w < 0.2 mm, hair cracks w = 0.2 - 0.5 mm, discernible from slow vehicle w = 0.5 - 3.0 mm, discernible from fast vehicle w = 3.0 - 6.0 mm	No Action Route and seal with epoxy. Within 7 days Route, seal and stitch, if L > 1 m. Within 7 days Dowel Bar Retrofit.	Staple or Dowel Bar Retrofit. Within 15 days Full Depth Repair Dismantle and

				5	w > 6 mm, usually associated with spalling, and/or slab rocking under traffic	Within 15 days  Not Applicable, as it may be full depth	reconstruct affected.  Portion with norms and specifications - See Para 5.5 & 9.2  Within 15days
3	Single Longitudinal Crack intersecting with one or more joints	w = width of crack L = length of crack d = depth of crack D = depth of slab	0	Nil, not discernible	No Action		
			1	w < 0.5 mm, discernible from slow moving vehicle	Seal with epoxy, if L > 1 m.  Within 7 days	Staple or dowel bar retrofit.  Within 15days	
			2	w = 0.5 - 3.0 mm, discernible from fast vehicle	Route seal and stitch, if L > 1 m.  Within 15 days		
			3	w = 3.0 – 6.0 mm	Staple, if L > 1 m.  Within 15 days	Partial Depth Repair with stapling.  Within 15days	
			4	w = 6.0 - 12.0 mm, usually associated with spalling			
			5	w > 12 mm, usually associated with spalling, and/or slab rocking under traffic	Not Applicable, as it may be full depth	Full Depth Repair Dismantle and reconstruct affected portion as per norms and specifications - See Para 5.6.4  Within 15days	

4	Multiple Cracks intersecting with one or more joints	w = width of crack	0	Nil, not discernible	No Action	
			1	w < 0.2 mm, hair cracks	Seal, and stitch if L > 1 m.	
			2	w = 0.2 - 0.5 mm. discernible from slow vehicle	Within 15 days	
			3	w = 0.5 - 3.0 mm, discernible from fast vehicle	Full depth repair within 15 days	Dismantle, Reinstatement Sub-base, Reconstruct whole slab as per specifications within 30 days
			4	w = 3.0 - 6.0 mm panel broken into 2 or 3 pieces		
5	w > 6 mm and/or panel broken into more than 4 pieces					
5	<b>Corner Break</b>	w = width of crack L = length of crack	0	Nil, not discernible	No Action	
			1	w < 0.5 mm; only 1 corner broken	Seal with low viscosity epoxy to	Seal with epoxy seal with epoxy
			2	w < 1.5 mm; L < 0.6 m, only one corner broken	secure broken parts	Within 7 days
			3	w < 1.5 mm; L < 0.6 m, two corners broken	Partial Depth (Refer Figure 8.3 of IRC:SP: 83-2008)	Full depth repair
			4	w > 1.5 mm; L > 0.6 m or three corners broken	Within 15 days	Reinstate sub-base, and reconstruct the
5	three or four corners broken					

						slab as per norms and specifications within 30days
6	Punchout (Applicable to Continuous Reinforced Concrete Pavement (CRCP) only)	w = width of crack L = length (m/m <sup>2</sup> )	0	Nil, not discernible	<b>Not Applicable, as it may be full depth</b>	No Action
			1	w < 0.5 mm; L < 3 m/m <sup>2</sup>		Seal with low viscosity epoxy to secure broken parts.
			2	either w > 0.5 mm or L < 3 m/m <sup>2</sup>		Within 15 days
			3	w > 1.5 mm and L < 3 m/m <sup>2</sup>		Full depth repair - Cut out and replace damaged area taking care not to damage Reinforcement.
			4	w > 3 mm, L < 3 m/m <sup>2</sup> and deformation		
5	w > 3 mm, L > 3 m/m <sup>2</sup> and deformation	Within 30days				
7	Raveling or Honeycomb type surface	r = area damaged surface/total surface of slab (%) h = maximum depth of damage	0	Nil, not discernible	No Action	
			1	r < 2 %	Local repair of areas Damaged	
			2	r = 2 - 10 %	and liable to be damaged.	Within 15 days
			3	r = 10-25%	Bonded Inlay, 2 or 3 slabs if	

			4	$r = 25 - 50 \%$	Affecting Within 30 days	
			5	$r > 50\%$ and $h > 25 \text{ mm}$	Reconstruct slabs, 4 or more slabs if affecting. Within 30 days	
8	Scaling	$r = \text{damaged surface/total surface of slab } (\%)$ $h = \text{maximum depth of damage}$	0	Nil, not discernible	Short Term No Action	Long Term
			1	$r < 2 \%$	Local repair of areas Damaged	
			2	$r = 2 - 10 \%$	and liable to be damaged. Within 7days	
			3	$r = 10 - 20\%$	Bonded Inlay within 15 Days	
			4	$r = 10 - 30\%$	Reconstruct slab within 30 days	
			5	$r > 30 \%$ and $h > 25 \text{ mm}$		
9	Polished Surface/Glazing	$t = \text{texture depth, sand patch test}$	0		No action	
			1	$t > 1 \text{ mm}$		

			2	$t = 1 - 0.6 \text{ mm}$		Not Applicable
			3	$t = 0.6 - 0.3 \text{ mm}$	Monitor rate of deterioration	
			4	$t = 0.3 - 0.1 \text{ mm}$	Diamond Grinding if Affecting	
			5	$t < 0.1 \text{ mm}$	50% or more slabs in a Continuous stretch of minimum 5 km. Within 30 days	
10	Popout (Small Hole), Pothole Refer Para 8.4	n = number/m <sup>2</sup> d = diameter h = maximum depth	0	$d < 50 \text{ mm}; h < 25 \text{ mm}; n < 1 \text{ per } 5 \text{ m}^2$	No action.	Not Applicable
			1	$d = 50 - 100 \text{ mm}; h < 50 \text{ mm}; n < 1 \text{ per } 5 \text{ m}^2$	Partial depth repair 65 mm deep.	
			2	$d = 50 - 100 \text{ mm}; h > 50 \text{ mm}; n < 1 \text{ per } 5 \text{ m}^2$	Within 15 days	
			3	$d = 100 - 300 \text{ mm}; h < 100 \text{ mm}; n < 1 \text{ per } 5 \text{ m}^2$	Partial depth repair 110mm	
			4	$d = 100 - 300 \text{ mm}; h > 100$	i.e.10 mm more than the depth of the hole.	

			5	mm; n < 1 per 5 m <sup>2</sup>  d > 300 mm; h > 100 mm: n > 1 per 5 m <sup>2</sup>	Within 30 days  Full depth repair.  Within 30 days	
11	Joint Seal Defects	loss or damage L = Length as % total joint length	0	Difficult to discern.	No action.	Not Applicable
			1	Discernible, L < 25% but of little immediate consequence with regard to ingress of water or trapping incompressible material.	Clean joint, inspect later.	
			2	Notable. L > 25% insufficient protection against ingress of water and trapping incompressible material.	Clean and reapply sealant in  Selected locations.  Within 7 days	
			4	Severe; w > 3 mm negligible protection against ingress of water and trapping incompressible material.	Clean, widen and reseal the joint.  Within 7 days	
12	Spalling of Joints	w = width on either side of the joint L = length of spalled portion (as % joint	0	Nil, not discernible	No action.	
			1	w < 10 mm	Apply low viscosity epoxy resin/ mortar	

		length)	2	w = 10 - 20 mm, L < 25%	in cracked portion. Within 7 days Partial Depth Repair.	Not Applicable
			3	w = 20 - 40 mm, L > 25%	Within 15 days	
			4	w = 40 - 80 mm, L > 25%	30 - 50 mm deep, h = w + 20% of w, within 30 days	
			5	w > 80 mm, and L > 25%	50 - 100 mm deep repair.  H = w + 20% of w.  Within 30 days	
13	Faulting (or Stepping) in Cracks or Joints	f = difference of level	0	not discernible, < 1 mm	No action.	No action.
			1	f < 3 mm		
			2	f = 3 - 6 mm	Determine cause and observe, take action for diamond grinding	Replace the slab as appropriate.
			3	f = 6 - 12 mm	Diamond Grinding	Within 30days

			4	f= 12 - 18 mm	Raise sunken slab.	Replace the slab as appropriate.  Within 30days
			5	f> 18 mm	Strengthen sub-grade and sub-base by grouting and raising sunken slab	
14	Blowup or Buckling	h = vertical displacement from normal profile	0	Nil, not discernible	No Action	
			1	h < 6 mm	Install Signs to Warn Traffic  within 7 days  Full Depth Repair.  Within 30 days  Replace broken slabs.  Within 30 days	
			2	h = 6 - 12 mm		
			3	h = 12 - 25 mm		
			4	h > 25 mm		
			5	shattered slabs, ie 4 or more pieces		
15	Depression	h = negative vertical displacement from normal profile L=length	0	Not discernible, h < 5 mm	No action.	
			1	h = 5 - 15 mm		

			2	h = 15-30 mm, Nos <20% joints	Install Signs to Warn Traffic within 7 days	Not Applicable
			3	h = 30 - 50 mm		
			4	h > 50 mm or > 20% joints	Strengthen subgrade.	
			5	h > 100 mm	Reinstate pavement at normal level if L < 20 m.  Within 30 days	
16	Heave	h = positive vertical displacement from normal profile.  L = length	0	Not discernible. h < 5 mm	No action.	scrabble
			1	h = 5 - 15 mm	Follow up.	
			2	h = 15 - 30 mm, Nos <20% joints	Install Signs to Warn Traffic	
			3	h = 30 - 50 mm	within 7 days	
			4	h > 50 mm or > 20% joints	Stabilise subgrade. Reinstate pavement at normal level if length < 20 m.	
			5	h > 100 mm		

					Within 30 days		
17	Bump	h = vertical displacement from normal profile	0	h < 4 mm	No action	Construction Limit for New Construction.	
			1	h = 4 - 7 mm	Grind, in case of new construction within 7 days		
			3	h = 7 - 15 mm	Grind, in case of ongoing Maintenance within 15 days		Replace in case of new construction. Within 30days
			4	h > 15 mm	Full Depth Repair. Within 30 days		Full Depth Repair. Within 30days
18	Lane to Shoulder Dropoff	f = difference of level	0	Nil, not discernible < 3mm	<b>Short Term</b> No Action	<b>Long Term</b>	
			1	f = 3 - 10 mm	Spot repair of shoulder		
			2	f = 10 - 25 mm	within 7 days		

			3	f = 25 - 50 mm	Fill up shoulder  within 7 dayss	For any 100 m Stretch Reconstruct shoulder, if affecting 25% or more of stretch.  Within 30days
			4	f = 50 - 75 mm		
			5	f > 75 mm		
<b>Drainage</b>						
19	Pumping	quantity of fines and water expelled through open joints and cracks Nos	0	not discernible	No Action	
			1 to 2	slight/ occasional Nos < 10%	Repair cracks and joints Without delay.	Inspect and repair sub-drainage at distressed sections and upstream.
			3 to 4	appreciable/ Frequent 10 - 25%	Lift or jack slab  within 30 days.	
			5	abundant, crack development > 25%	Repair distressed pavement sections. Strengthen subgrade and subbase. Replace slab.  Within 30 days	
20	Ponding	Ponding on slabs due to blockage of drains	0-2	No discernible problem	No action.	

			3 to 4	Blockages observed in drains, but water flowing	Clean drains etc within 7 days, Follow up	Action required to stop water damaging foundation within 30 days.
			5	Ponding, accumulation of water observed	-do	

**Table -3: Maintenance Criteria for Safety Related Items and Other Furniture Items:**

Asset Type	Performance Parameter	Level of Service (LOS)			Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
<b>Highway</b>	Availability of Safe Sight Distance	As per IRC SP :84-2014, a minimum of safe stopping sight distance shall be available throughout.			Monthly	Manual Measurements with Odometer along with video/ image backup	Removal of obstruction within 24 hours, in case of sight line affected by temporary objects such as trees, temporary encroachments. In case of permanent structure or design deficiency: Removal of obstruction/improvement of deficiency at the earliest Restriction boards and suitable traffic calming measures such as transverse bar marking, blinkers, etc. shall be applied during the period of rectification.		IRC:SP 84-2014
		Design Speed, kmph	Desirable Minimum Sight Distance (m)	Safe Stopping Sight Distance (m)					
		100	360	180					
		80	260	130					
Pavement Marking	Wear	<70% of marking remaining			Bi-Annually	<b>Visual Assessment as per Annexure-F</b>	Re - painting	Cat-1 Defect - within 24 hours Cat-2 Defect -	IRC:35-2015

				<b>of IRC:35-2015</b>		within 2 months		
	Day time Visibility	During expected life Service Time Cement Road - 130mcd/m <sup>2</sup> /lux Bituminous Road - 100mcd/m <sup>2</sup> /lux	Monthly	As per Annexure-D of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect – within 2 months	IRC:35-2015	
	Night Time Visibility	<u>Initial and Minimum Performance for Dry Retro reflectivity during night time:</u>	Bi-Annually	As per Annexure-E of IRC:35-2015	Re - painting	Cat-1 Defect – within 24 hours Cat-2 Defect – within 2 months	IRC:35-2015	
		Design Speed						(RL) Retro Reflectivity (mcd/m <sup>2</sup> /lux)
		Up to 65						200      80
		65-100						250      120
		Above 100						350      150
		Initial and Minimum Performance for Night Visibility under wet condition (Retro reflectivity):						
Road Signs	Shape and Position	Shape and Position as per IRC:67-2012. Signboard should be clearly visible for the design speed of the section.	Daily	Visual with video/image backup	Improvement of shape, in case if shape is damaged.  Relocation as Per requirement	48 hours in case of Mandatory Signs, Cautionary and Informatory Signs (Single and Dual post signs) 15 Days in case of	IRC:67-2012	

						Gantry/Cantilever Sign boards	
	Retro reflectivity	As per specifications in IRC:67-2012	Bi-Annually	Testing of Each signboard using Retro Reflectivity Measuring Device. In accordance with ASTM D 4956-09.	Change of signboard	48 hours in case of Mandatory Signs, Cautionary and Informatory Signs (Single and Dual post signs) 1 Month in case of Gantry/ Cantilever Sign boards	IRC:67-2012
Kerb	Kerb Height	As per IRC 86:1983 depending upon type of Kerb	Bi-Annually	Use of distance measuring tape	Raising Kerb Height	Within 1 Month	IRC 86:1983
	Kerb Painting	Functionality: Functioning of Kerb painting as intended	Daily	Visual with video/image backup	Kerb Repainting	Within 7-days	IRC 35:2015
Other Road Furniture	Reflective Pavement Markers (Road Studs)	Numbers and Functionality as per specifications in IRC:SP:84-2014 and IRC:35-2015, unless specified in Schedule-B.	Daily	Counting	New Installation	Within 2 months	IRC:SP:84-2014, IRC:35-2015
	Pedestrian Guardrail	Functionality: Functioning of guardrail as intended	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:SP:84-2014
	Traffic Safety Barriers	Functionality: Functioning of Safety Barriers as intended	Daily	Visual with video/image	Rectification	Within 7 days	IRC:SP:84-2014,

				backup			IRC:119- 2015	
	End Treatment of Traffic Safety Barriers	Functionality: Functioning of End Treatment as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84-2014, IRC:119- 2015	
	Attenuators	Functionality: Functioning of Attenuators as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP-2014, IRC:119- 2015	
	Guard Posts and Delineators	Functionality: Functioning of Guard Posts and Delineators as intended	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC: 79 - 1981	
	Overhead Sign Structure	Overhead sign structure shall be structurally adequate	Daily	Visual with video/image backup	Rectification	Within 15 days	IRC:67-2012	
	Traffic Blinkers	Functionality: Functioning of Traffic Blinkers as intended	Daily	Visual with video/image backup	Rectification	Within 7 days	IRC:SP:84-2014	
Highway Lighting System	Highway Lights	Illumination: Minimum 40 Lux illumination on the road surface	Daily	The illumination level shall be measured with luxmeter	Improvement in Lighting System	24 hours	IRC:SP:84-2014	
			Daily	No major failure in the lighting system	-	Rectification of failure	24 hours	IRC:SP:84-2014
			Monthly	No minor failure in the lighting system	-	Rectification of failure	8 hours	IRC:SP:84-2014
	Toll Plaza Canopy Lights	Minimum 40 Lux illumination on the road surface	Daily	The illumination level shall be measured with luxmeter	Improvement in Lighting System	24 hours	IRC:SP:84-2014	
			Daily	No major/minor failure in the lighting system	-	Rectification of failure	8 hours	IRC:SP:84-2014

Trees and Plantation including median plantation	Obstruction in a minimum head-room of 5.5 m above carriageway or obstruction in visibility of road signs	No obstruction due to trees	Monthly	Visual with video/image backup	Removal of trees	Immediate	IRC:SP:84-2014
	Deterioration in health of trees and bushes	Health of plantation shall be as per requirement of specifications & instructions issued by Authority from time to time	Daily	Visual with video/image backup	Timely watering and treatment. Or Replacement of Trees and Bushes.	Within 90 days	IRC:SP:84-2014
	Vegetation affecting sight line and road structures	Sight line shall be free from obstruction by vegetation	Daily	Visual with video/image backup	Removal of trees	Immediate	IRC:SP 84-2014
Rest Areas	Cleaning of toilets	-	Daily	-	-	Every 4 hours	
	Defects in electrical, water and sanitary installations	-	Daily	-	Rectification	24 hours	
Other Project Facilities and Approach roads	Damage or deterioration in Approach Roads, pedestrian facilities, truck lay-bys, bus-bays, busshelters, cattle crossings, Traffic Aid Posts, Medical Aid Posts and other works		Daily	-	Rectification	15 days	IRC:SP 84-2014

Asset Type	Performance Parameter	Level of Service (LOS)	Frequency of Measurement	Testing Method	Recommended Remedial measures	Time limit for Rectification	Specifications and Standards
Pipe/box/slab culverts	Free waterway/unobstructed flow section	85% of culvert normal flow area to available.	2 times in a year (before and after rainy season)	Inspection by Bridge Engineer as per IRC SP: 35-1990 and recording of depth of silting and area of vegetation.	Cleaning silt up soils and debris in culvert barrel after rainy season, removal of bushes and vegetation, U/s of barrel, under barrel and D/s of barrel before rainy season.	15 days before onset of monsoon and within 30 days after end of rainy season.	IRC 5-2015, IRC SP:40-1993 and IRC SP:13-2004
	Leak-proof expansion joints if any	No leakage through expansion joints	Bi-Annually	Physical inspection of expansion joints as per IRC SP: 35-1990 if any, for leakage strains on walls at joints.	Fixing with sealant suitably	30 days or before onset of rains whichever comes earlier	IRC SP:40-1993 and IRC SP:69-2011
	Structurally sound	Spalling of concrete not more than 0.25 sqm	Bi-Annually	Detailed inspection of all components of culvert as per IRC SP:35-1990 and recording the defects	Repairs to spalling, cracking, delamination, rusting shall be followed as per IRC:SP:40-1993.	15 days	IRC SP 40-1993 and MORTH Specification s clause 2800
Delamination of concrete not more than 0.25 sq.m.							
Cracks wider than 0.3 mm not							

		more than 1m aggregatelength					
	Protection works in good condition	Damaged of rough stone apron or bank revetment not more than 3 sqm, damage to solid apron (concreteapron) not more than 1 sqm	2 times in a year (before and after rainy season)	Condition survey as per IRC SP:35- 1990	Repairs to damaged aprons and pitching	30 days after defect observation or 2 weeks before onset of rainy season whichever is earlier.	IRC: SP 40- 1993 and IRC:SP:13- 2004.
<b>Bridges including ROBs Flyover etc. as applicable</b>	Riding quality or user comfort	No pothole in wearing coat on bridge deck	Daily	Visual inspection as per IRC SP:35- 1990	Repairs to BC or wearing coat	15 days	MORT&H Specification 2811
<b>Bridge -Super Structure</b>	Bumps	No bump at expansion joint	Daily	Visual inspection as per IRC SP:35- 1990	Repairs to BC on either side of expansion joints, profile correction course on approach slab in case of settlement to approach embankment	15 days	MORT&H Specification 3004.2 & 2811.
	User safety (condition of crash barrier and guard rail)	No damaged or missing stretch of crash barrier or pedestrian hand railing	Daily	Visual inspection and detailed condition survey as per IRC SP: 35- 1990.	Repairs and replacement of safety barriers as the case may be	<b>3</b> days	IRC: 5-1998, IRC SP: 84- 2014 and IRC SP: 40- 1993.

	Rusted reinforcement	Not more than 0.25 sq.m	Bi- Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	All the corroded reinforcement shall need to be thoroughly cleaned from rusting and applied with anti-corrosive coating before carrying out the repairs to affected concrete portion with epoxy mortar / concrete.	15 days	IRC SP: 40-1993 and MORTH Specification 1600.
	Spalling of concrete	Not more than 0.50 sq.m					
	Delamination	Not more than 0.50 sq.m					
	Cracks wider than 0.30 mm	Not more than 1m total length	Bi- Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Grouting with epoxy mortar, investigating causes for cracks development and carry out necessary rehabilitation	48 Hours	IRC SP: 40-1993 and MORTH Specification 2800.
	Rainwater seepage through deck slab	Leakage - nil	Quarterly	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	Grouting of deck slab at leakage areas, waterproofing, repairs to drainage spouts	1 months	MORTH specifications 2600 & 2700
	Deflection due to permanent loads and live loads	Within design limits.	Once in every 10 years for spans more than 40 m	Load test method	Carry out major rehabilitation works on bridge to retain original design loads	6 months	IRC SP: 51-1999.

					capacity		
	Vibrations in bridge deck due to moving trucks	Frequency of vibrations shall not be more than 5 Hz	Once in every 5 years for spans more than 30m and every 10 years for spans between 15 to 30 m	Laser displacement sensors or laser vibro-meters	Strengthening of super structure	4 months	AASHTO LRFD specifications
	Leakage in Expansion joints	No damage to elastomeric sealant compound in strip seal expansion joint, no leakage of rain water through expansion joint in case of buried and asphalt plug and copper strip joint	Bi-Annually	Detailed condition survey as per IRC SP:35-1990 using Mobile Bridge Inspection Unit	Replace of seal in expansion joint	15 days	MORTH specifications 2600 and IRC SP: 40-1993.
	Debris and dust in strip seal expansion joint	No dust or debris in expansion joint gap.	Monthly	Detailed condition survey as per IRC SP:35-1990 using Mobile Bridge Inspection Unit	Cleaning of expansion joint gaps thoroughly	3 days	MORTH specifications 2600 and IRC SP: 40-1993.
	Drainage spouts	No down take pipe missing/broken below soffit of the deck slab. No	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using	Cleaning of drainage spouts thoroughly. Replacement of missing/broken down take pipes	3 days	MORTH specification 2700.

		silt, debris, clogging of drainage spout collection chamber.		Mobile Bridge Inspection Unit	with a minimum pipe extension of 500mm below soffit of slab. Providing sealant around the drainage spout if any leakages observed		
<b>Bridge-substructure</b>	Cracks/ spalling of concrete/ Rusted steel	No cracks, spalling of concrete and rusted steel	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	All the corroded reinforcement shall need to be thoroughly cleaned from rusting and applied with anti-corrosive coating before carrying out repairs to substructure by grouting/guniting and micro concreting depending on type of defect noticed	30 days	IRC SP: 40-1993 and MORTH specification 2800.
	Bearings	Delaminating of bearing reinforcement not more than 5%, cracking or tearing of rubber not more than 2 locations per	Bi-Annually	Detailed condition survey as per IRC SP: 35-1990 using Mobile Bridge Inspection Unit	In case of failure of even one bearing on any pier/abutment, all the bearings on that pier/abutment shall be replaced, in order to get uniform	3 months	MORTH specification 2810 and IRC SP: 40-199.

		side, no rupture of reinforcement or rubber			load transfer on to bearings.		
<b>Bridge Foundations</b>	Scouring around foundations	Scouring shall not be lower than maximum scour level for the bridge	Bi-Annually	Condition survey and visual Inspection as per IRC SP:35-1990 using Mobile Bridge Inspection Unit. In case of doubt, use Underwater camera for inspection of deep wells in major Rivers.	suitable protection works around pier/abutment	1 months	IRC SP: 40-1993, IRC 83-2014, MORTH specification 2500
	Protection works in good condition	Damaged of rough stone apron or bank revetment not more than 3 sq.m, damage to solid apron (concrete apron) not more than 1 sq.m	2 times in a year (before and after rainy season)	Condition survey as per IRC SP:35-1990	Repairs to damaged aprons and pitching.	30 days After defect observation or 2 weeks before onset of rainy season whichever is earlier.	IRC: SP 40-1993 and IRC:SP:13-2004.
<b>Note:</b> Any Structure during the entire contract period which is found that does not complies with all requirements of this Table will be prepared, rehabilitated or even reconstructed under the scope of the contractor.							

**Table 4:** Maintenance Criteria for Structures and Culverts:**Table 5: Maintenance Criteria for Hill Roads**

In addition to above, for hill roads the following provisions for maintenance is also to done.

<b>Hill Roads</b>		
(i)	Damage to Retaining wall/ Breast wall	7 (Seven) days
(ii)	Landslides requiring clearance	12 (Twelve) hours
(iii)	Snow requiring clearance	24 (Twenty Four) hours

**Note: For all tables 1 to 5 above, latest BIS & IRC standards (even those not indicated herewith) along with MoRTH specifications shall be binding for all maintenance activities.**

#### A. Flexible Pavement

<b>Nature of Defect or deficiency</b>		<b>Time limit for repair/rectification</b>
<b>(b) Granular earth shoulders, side slopes, drains and culverts</b>		
(i)	Variation by more than 1 % in the prescribed slope of camber/cross fall (shall not be less than the camber on the main carriageway)	7 (seven) days
(ii)	Edge drop at shoulders exceeding 40 mm	7 (seven) days
(iii)	Variation by more than 15% in the prescribed side (embankment) slopes	30 (thirty) days
(iv)	Rain cuts/gullies in slope	7 (seven) days
(v)	Damage to or silting of culverts and side drains	7 (seven) days
(vi)	Desilting of drains in urban/semi- urban areas	24 (twenty four) hours
(vii)	Railing, parapets, crash barriers	7 (seven) days (Restore immediately if causing safety hazard)
<b>(c) Road side furniture including road sign and pavement marking</b>		
(i)	Damage to shape or position, poor visibility or loss of retro- reflectivity	48 (forty eight) hours
(ii)	Painting of km stone, railing, parapets, crash barriers	As and when required/ Once every year
(iii)	Damaged/missing signs road requiring replacement	7 (seven) days
(vi)	Damage to road mark ups	7 (seven) days
<b>(d) Road lighting</b>		
(i)	Any major failure of the system	24 (twenty four) hours
(ii)	Faults and minor failures	8 (eight) hours
<b>(e) Trees and plantation</b>		
(i)	Obstruction in a minimum head- room of 5 m above carriageway or obstruction in visibility of road signs	24 (twenty four)hours
(ii)	Removal of fallen trees from carriageway	4 (four) hours
(iii)	Deterioration in health of trees and bushes	Timely watering and treatment
(vi)	Trees and bushes requiring replacement	30 (thirty) days
(v)	Removal of vegetation affecting sight line and road structures	15 (fifteen) days
<b>(f) Rest area</b>		
(i)	Cleaning of toilets	Every 4 (four) hours
(ii)	Defects in electrical, water and sanitary	24 (twenty four) hours

	installations	
<b>(g) [Toll Plaza]</b>		
<b>(h) Other Project Facilities and Approach roads</b>		
(i)	Damage in approach roads, pedestrian facilities, truck lay- byes, bus-bays, bus-shelters, cattle crossings, [Traffic Aid Posts, Medical Aid Posts] and service roads	15 (fifteen) days
(ii)	Damaged vehicles or debris on the road	4 (four) hours
(iii)	Malfunctioning of the mobile crane	4 (four) hours
<b>Bridges</b>		
<b>(a) Superstructure</b>		
(i)	Any damage, cracks, spalling/ scaling Temporary measures Permanent measures	within 48 (forty eight) hours within 15 (fifteen) days or as specified by the Authority's Engineer
<b>(b) Foundations</b>		
(i)	Scouring and/or cavitation	15 (fifteen) days
<b>(c) Piers, abutments, return walls and wing walls</b>		
(i)	Cracks and damages including settlement and tilting, spalling, scaling	30 (thirty) days
<b>(d) Bearings (metallic) of bridges</b>		
(i)	Deformation, damages, tilting or shifting of bearings	15 (fifteen) days Greasing of metallic bearings once in a year
<b>(e) Joints</b>		
(i)	Malfunctioning of joints	15 (fifteen) days
<b>(f) Other items</b>		
(i)	Deforming of pads in elastomeric bearings	7 (seven) days
(ii)	Gathering of dirt in bearings and joints; or clogging of spouts, weep holes and vent-holes	3 (three) days
(iii)	Damage or deterioration in kerbs, parapets, handrails and crash barriers	3 (three) days (immediately within 24 hours if posing danger to safety)
(vi)	Rain-cuts or erosion of banks of the side slopes of approaches	7 (seven) days
(v)	Damage to wearing coat	15 (fifteen) days
(vi)	Damage or deterioration in approach slabs, pitching, apron, toes, floor or guide bunds	30 (thirty) days
(vii)	Growth of vegetation affecting the structure or obstructing the waterway	15 (fifteen) days
<b>(g) Hill Roads</b>		
(i)	Damage to retaining wall/breast wall	7 (seven) days
(ii)	Landslides requiring clearance	12 (twelve) hours
(iii)	Snow requiring clearance	24 (twenty four) hours
<b>[Note: Where necessary, the Authority may modify the time limit for repair/rectification, or add to the nature of Defect or deficiency before issuing the bidding document, with the approval of the competent authority.]</b>		

SCHEDULE - F  
(See Clause 3.1.7(a))

**APPLICABLE PERMITS**

**1 Applicable Permits**

- (i) The Contractor shall obtain, as required under the Applicable Laws, the following Applicable Permits:
  - (a) Permission of the State Government for extraction of boulders from quarry;
  - (b) Permission of Village Panchayats and Pollution Control Board for installation of crushers;
  - (c) License for use of explosives;
  - (d) Permission of the State Government for drawing water from river/reservoir;
  - (e) License from inspector of factories or other competent Authority for setting up batching plant;
  - (f) Clearance of Pollution Control Board for setting up batching plant;
  - (g) Clearance of Village Panchayats and Pollution Control Board for setting up asphalt plant;
  - (h) Permission of Village Panchayats and State Government for borrow earth; and
  - (i) Any other permits or clearances required under Applicable Laws.
- (ii) Applicable Permits, as required, relating to environmental protection and conservation shall have been procured by the Authority in accordance with the provisions of this Agreement.

**SCHEDULE – G**

*(See Clauses 7.1 and 19.2)*

**FORM OF BANK GUARANTEE**

Annex-I

*(See Clause 7.1)*

**[Performance Security/Additional Performance Security]**

To,  
The Managing Director,  
National Highways & Infrastructure Development Corporation Limited  
PTI Building, 3<sup>rd</sup> Floor,  
4, Parliament Street  
New Delhi – 110001

WHEREAS:

- (A) \_\_\_\_\_ [name and address of contractor] (hereinafter called the “**Contractor**”) and [name and address of the authority], (hereinafter called the “**Authority**”) have entered into an agreement (hereinafter called the “**Agreement**”) for the construction of the “**Construction of two lanes with paved shoulders road from Tamenglong to Mahur (NH-137) in the State of Manipur starting from km 54.180 near Azuram to km 80.630 (Package-5) near Makru River on EPC mode.**” subject to and in accordance with the provisions of the Agreement
- (B) The Agreement requires the Contractor to furnish a Performance Security for due and faithful performance of its obligations, under and in accordance with the Agreement, during the {Construction Period/ Defects Liability Period and Maintenance Period} (as defined in the Agreement) in a sum of Rs..... cr. (Rupees ..... crore) (the “**Guarantee Amount**”).
- (C) We, ..... through our branch at ..... (the “**Bank**”) have agreed to furnish this bank guarantee (*hereinafter called the “**Guarantee**”*) by way of Performance Security.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful performance of the Contractor’s obligations during the {Construction Period/ Defects Liability Period and Maintenance Period} under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.

2. A letter from the Authority, under the hand of an officer not below the rank of [General Manager in the National Highways & Infrastructure Development Corporation Limited], that the Contractor has committed default in the due and faithful performance of all or any of its obligations under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.
3. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
4. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
5. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Agreement or to extend the time or period for the compliance with, fulfillment and/ or performance of all or any of the obligations of the Contractor contained in the Agreement or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Agreement or for the fulfillment, compliance and/or performance of all or any of the obligations of the Contractor under the Agreement.

7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
8. The Guarantee shall cease to be in force and effect on \*\*\*\*<sup>§</sup>. Unless a demand or claim under this Guarantee is made in writing before expiry of the Guarantee, the Bank shall be discharged from its liabilities hereunder.
9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorized to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was posted shall be conclusive.
11. This Guarantee shall come into force with immediate effect and shall remain in force and effect for up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.
12. This guarantee shall also be operatable at our..... Branch at New Delhi, from whom, confirmation regarding the issue of this guarantee or extension / renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.

---

<sup>§</sup> Insert date being 2 (two) years from the date of issuance of this Guarantee (in accordance with Clause 7.2 of the Agreement).

13. Bank Guarantee has been sent to authority's bank through SFMS gateway as per the details below:-

S. No.	Particulars	Details
1.	Name of the Beneficiary	National Highways & Infrastructure Development Corporation Limited
2.	Beneficiary Bank Account No.	90621010002659
3.	Beneficiary Bank Branch	IFSC CNRB0019062
4.	Beneficiary Bank Branch Name	Transport Bhawan, New Delhi
5.	Beneficiary Bank Address	Canara Bank (erstwhile Syndicate Bank), Transport Bhawan, 1 <sup>st</sup> Parliament Street, New Delhi - 110001

14.

Signed and sealed this ..... day of ....., 20..... at .....

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:  
(Signature)  
(Name)  
(Designation)  
(Code Number)  
(Address)

NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.
- (ii) (ii) The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.

Annex – II  
(Schedule - G)  
(See Clause 19.2)

## Form for Guarantee for Advance Payment

To,  
The Managing Director,  
National Highways & Infrastructure Development Corporation Limited  
PTI Building, 3<sup>rd</sup> Floor,  
4, Parliament Street  
New Delhi – 110001

WHEREAS:

- (A) [name and address of contractor] (hereinafter called the “**Contractor**”) has executed an agreement (hereinafter called the “**Agreement**”) with the NHIDCL, (hereinafter called the “**Authority**”) for the construction of the “**Construction of two lanes with paved shoulders road from Tamenglong to Mahur (NH-137) in the State of Manipur starting from km 54.180 near Azuram to km 80.630 (Package-5) near Mandeu on EPC mode.**”, subject to and in accordance with the provisions of the Agreement.
- (B) In accordance with Clause 19.2 of the Agreement, the Authority shall make to the Contractor an interest bearing @*Bank Rate* + 3% advance payment (herein after called “**Advance Payment**”) equal to 10% (ten per cent) of the Contract Price; and that the Advance Payment shall be made in two installments subject to the Contractor furnishing an irrevocable and unconditional guarantee by a scheduled bank for an amount equivalent to 110% (one hundred and ten percent) of such installment to remain effective till the complete and full repayment of the installment of the Advance Payment as security for compliance with its obligations in accordance with the Agreement. The amount of {first/second} installment of the Advance Payment is Rs. ----- cr. (Rupees ----- crore) and the amount of this Guarantee is Rs. ----- cr. (Rupees ----- crore) (the “**Guarantee Amount**”)<sup>5</sup>.
- (C) We, ..... through our branch at ..... (the “**Bank**”) have agreed to furnish this bank guarantee (hereinafter called the “**Guarantee**”) for the **Guarantee Amount**.

NOW, THEREFORE, the Bank hereby unconditionally and irrevocably guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful repayment on time of the aforesaid instalment of the Advance Payment under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Contractor, such sum or sums up to an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.

---

<sup>5</sup> The Guarantee Amount should be equivalent to 110% of the value of the applicable instalment.

A letter from the Authority, under the hand of an officer not below the rank of [General Manager in the National Highways & Infrastructure Development

Corporation Limited], that the Contractor has committed default in the due and faithful performance of all or any of its obligations for under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Contractor is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Contractor is in default shall be final, and binding on the Bank, notwithstanding any differences between the Authority and the Contractor, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Contractor for any reason whatsoever.

2. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Contractor and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.
3. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Contractor before presenting to the Bank its demand under this Guarantee.
4. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Advance Payment or to extend the time or period of its repayment or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Contractor, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Contractor or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.
5. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Retention Money.
6. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.
7. The Guarantee shall cease to be in force and effect on \*\*\*\*.<sup>§</sup> Unless a demand or claim under this Guarantee is made in writing on or before the aforesaid date, the Bank shall be discharged from its liabilities hereunder.

---

<sup>§</sup> Insert a date being 90 (ninety) days after the end of one year from the date of payment of the Advance payment to the Contractor (in accordance with Clause 19.2 of the Agreement).

8. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.
9. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.
10. This Guarantee shall come into force with immediate effect and shall remain in force and effect up to the date specified in paragraph 8 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.
11. This guarantee shall also be operatable at our..... Branch at New Delhi, from whom, confirmation regarding the issue of this guarantee or extension / renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.
12. Bank Guarantee has been sent to authority's bank through SFMS gateway as per the details below:-

S. No.	Particulars	Details
1.	Name of the Beneficiary	National Highways & Infrastructure Development Corporation Limited
2.	Beneficiary Bank Account No.	90621010002659
3.	Beneficiary Bank Branch	IFSC CNRB0019062
4.	Beneficiary Bank Branch Name	Transport Bhawan, New Delhi
5.	Beneficiary Bank Address	Canara Bank (erstwhile Syndicate Bank), Transport Bhawan, 1 <sup>st</sup> Parliament Street, New Delhi - 110001

Signed and sealed this ..... day of ....., 20..... at .....

SIGNED, SEALED AND DELIVERED

For and on behalf of the Bank by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

- (i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.
- (ii) The address, telephone number and other details of the head office of the Bank as well as of issuing branch should be mentioned on the covering letter of issuing branch.
- (iii)



		<b>D-Re-construction/ New culverts on existing road, realignments, bypasses:</b> Culvert (Length<6m)	[17.94%]
Minor Bridge/ Underpasses/Overpasses	1.51%	<p><b>A.1- Widening and repairs of Minor Bridges (length&gt;6m and &lt;60m)</b></p> <p>Minor bridges [0%]</p> <p><b>A.2 New Minor Bridges (length&gt;6m and &lt;60m)</b></p> <p><b>(1) Foundation</b> [82.41%] +<b>Sub-Structure:</b> On completion of the foundation work including foundations for wing and return walls, abutments, piers upto the abutment/pier cap.</p> <p><b>(2)Super Structure:</b> On completion of the super-structure in all respects including Girder, Deck slab, bearings [9.83%]</p> <p><b>(3)Approaches:</b> On completion of approaches including Retaining walls, stone pitching, protection works complete in all respect, tests on completion in all respect and fit for use [7.76%]</p> <p><b>(4)Guide Bunds and River Training Works:</b> [0%] On completion of Guide Bunds and River Training Works complete in all respect.</p> <p><b>B-1 Widening and repair of underpasses/ overpasses</b></p> <p>Underpasses/ Overpasses</p> <p><b>B-2 New underpasses/ overpasses</b></p> <p><b>(1) Foundation +Substructure:</b> On completion of the foundation work including foundation for wing and return wall, abutments, piers upto the abutment/pier cap. [0%]</p> <p><b>(2)Super Structure:</b> On completion of the super-structure in all respects including wearing coat, bearings, expansion joints, hand rails, crash barriers, road signs &amp; markings, tests on completion etc. complete in all respect. [0%] Wearing Coat (a) in case of Over pass wearing coat including expansion joints complete in all respects as specified and (b) in case of underpass- rigid pavement including drainage facility complete in all respects as specified.</p> <p><b>(3) Approaches:</b> On completion of approaches including Retaining walls/ Reinforced Earth walls, stone pitching, [0%]</p>	

		protection works complete in all respect and fit for use.	
Major Bridges (length>60m) work and ROB/RUB/elevated section/ flyover including viaducts, if any	3.30%	<p><b>A-1 Widening and repair of Major Bridges</b></p> <p>(1) Foundation [0%]  (2) Sub-structure [0%]  (3) Super-structure including bearings. [0%]  (4) wearing coat including expansion joints [0%]  (5) Miscellaneous Items like hand rails, crash barriers, road markings etc.) [0%]  (6)Wing walls/return walls up to top [0%]  (7) Guide bunds, river Training works etc. [0%]  (8)Approaches (including Retaining walls, stone pitching and protection works ) [0%]</p> <p><b>A.2New Major Bridges</b></p> <p>(1) Foundation [34.99%]  (2) Sub-structure [30.43%]  (3) Super-structure including bearings. [23.46%]  (4) wearing coat including expansion joints [5.42%]  (5) Miscellaneous Items like hand rails, crash barriers, road markings etc.) [2.3%]  (6)Wing walls/return walls [0%]  (7) Guide bunds, river Training works etc. [0.44%]  (8)Approaches (including Retaining walls, stone pitching and protection works ) [2.96%]</p> <p><b>B.1- Widening and repair of</b></p> <p><b>(a) ROB</b> [0%]  <b>(b) RUB</b></p> <p>(1) Foundation [0%]  (2) Sub-structure [0%]  (3) Super-structure (including bearings) [0%]  <b>(4) wearing coat: (a)</b> in case of ROB-wearing coat including expansion joints complete in all respects as specified and <b>(b)</b> in case of RUB- rigid pavement under RUB including drainage facility complete in all respects as specified and specified. [0%]  (5) Miscellaneous Items like hand rails, crash barriers, road markings etc.) [0%]  (6)Wing walls/return walls [0%]  (7)Approaches (including Retaining walls stone pitching and protection works) [0%]</p> <p><b>B.2- New ROB/ RUB</b></p> <p><b>(a) ROB</b>  <b>(b) RUB</b></p> <p>(1) Foundation [0%]  (2) Sub-structure [0%]  (3) Super-structure (including bearings) [0%]  <b>(4) wearing coat: (a)</b> in case of ROB-wearing coat including expansion joints complete in all respects as specified and</p>	

		<p>(b) in case of RUB- rigid pavement under RUB including drainage facility complete in all respects as specified and specified.</p> <p>(5) Miscellaneous Items like hand rails, crash barriers, road markings etc.) [0%]</p> <p>(6)Wing walls/return walls [0%]</p> <p>(7)Approaches (including Retaining walls/Reinforced Earth wall, stone pitching and protection works) [0%]</p> <p><b>C.1- Widening and repair of Elevated Section/Flyovers/Grade separators</b></p> <p>1) Foundation [0%]</p> <p>(2) Sub-structure [0%]</p> <p>(3) Super-structure (including bearings) [0%]</p> <p>(4) wearing coat including expansion joints [0%]</p> <p>(5) Miscellaneous Items like hand rails, crash barriers, road markings etc.) [0%]</p> <p>(6)Wing walls/return walls [0%]</p> <p>(7)Approaches (including Retaining walls/Reinforced Earth wall, stone pitching and protection works) [0%]</p> <p><b>C.2- New Elevated Section/Flyovers/Grade separators</b></p> <p>1) Foundation [0%]</p> <p>(2) Sub-structure [0%]</p> <p>(3) Super-structure (including bearings) [0%]</p> <p>(4) wearing coat including expansion joints [0%]</p> <p>(5) Miscellaneous Items like hand rails, crash barriers, road markings etc.) [0%]</p> <p>(6)Wing walls/return walls [0%]</p> <p>(7)Approaches (including Retaining walls/Reinforced Earth wall, stone pitching and protection works) [0%]</p>	
Other works	41.25%	<p>(i) Toll Plaza [0%]</p> <p>(ii) Road side drains [5.61%]</p> <p>(iii) Road signs, marking, km stones, safety devices,... [4.82%]</p> <p>(iv) Project facilities</p> <p>    (a) Bus bays [0%]</p> <p>    (b) Truck lay-byes [0.30%]</p> <p>    (c) Rest areas [0.22%]</p> <p>    (d) Others [0%]</p> <p>(v) Road side plantation [0%]</p> <p>(vi) Repair of protection works other than approaches to the bridges, elevated sections/ flyovers/grade separators and ROBs/RUBs. [0%]</p> <p>(vii) Safety and traffic management during construction [0%]</p> <p>(viii) Protection Works</p> <p>    a. Retaining Wall [43.76%]</p> <p>    b. Breast wall [32.44%]</p> <p>    c. Gabion [9.71%]</p>	

		d. Hydroseeding	[2.68%]
		(ix)Other Works	[0.46%]

### 1.3 Procedure of estimating the value of work done

#### 1.3.1 Road works

Procedure for estimating the value of road work done shall be as follows:

Table 1.3.1

Stage of Payment	Percentage -weightage	Payment Procedure
<b>A-Widening and strengthening of road</b>	0 %	Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in a length of not less than 10 (ten) percent of the total length.
(1) Earthwork up to top of the sub-grade		
(2) sub-base Course	0 %	
(3) Non Bituminous Base course	0 %	
(4) Bituminous Base course	0 %	
(5) Wearing Coat	0 %	
(6) Widening and repair of culverts	0%	Cost of ten completed culverts shall be determined on pro rata with respect to the total number of culverts. The Payment shall be made on the completion of atleast five culverts.
<b>B.1Reconstruction/ New 2-lane realignment, bypass (flexible pavement)</b>		Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in full length or 1 (one) km length, Whichever is less.
(1) Earthwork up to top of the sub-grade	43.79%	
(2) sub-base Course	8.15%	
(3) Non Bituminous Base course	10.53%	
(4) Bituminous Base course	14.40%	
(5) Wearing Coat	5.19%	
<b>B.2Reconstruction/ New 2-lane realignment, bypass</b>	0 %	Unit of measurement is linear length. Payment of each stage

<b>(Rigid pavement)</b> (1) Earthwork up to top of the sub-grade		shall be made on pro rata basis on completion of a stage in full length or 1 (one) km length, Whichever is less.
(2) <u>sub-base Course</u>	0 %	
(3) Dry lean concrete (DLC) Course	0 %	
(4) Pavement quality control (PQC) course	0 %	
<b>C.1-Reconstruction/ New Service Road (flexible pavement)</b> (1) Earthwork up to top of the sub-grade	0 %	Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in full length or 1 (one) km length, Whichever is less.
(2) sub-base Course	0%	
(3) Non Bituminous Base course	0 %	
(4) Bituminous Base course	0%	
(5) Wearing Coat	0 %	
<b>C.2Reconstruction/ New Service Road (Rigid pavement)</b> (1) Earthwork up to top of the sub-grade	0 %	Unit of measurement is linear length. Payment of each stage shall be made on pro rata basis on completion of a stage in full length or 1 (one) km length, Whichever is less.
(2) <u>sub-base Course</u>	0 %	
(3) Dry lean concrete (DLC) Course	0 %	
(4) Pavement quality control (PQC) course	0 %	
<b>D. Re-construction and new culverts on existing road, realignments, bypasses:</b> (1) Culvert (length<6m)	17.94%	Cost of each culvert shall be determined on pro rata basis with respect to the total number of culverts. Payment shall be made on the completion of atleast two culvert.

@. For example, if the total length of bituminous work to be done is 100 km, the cost per km of bituminous work shall be determined as follows:

$$\text{Cost per km} = P \times \text{weightage for road work} \times \text{weightage for bituminous work} \times (1/L)$$

Where P= Contract Price

L = Total length in km

Similarly, the rates per km for stages shall be worked out accordingly.

**Note: The length affected due to law and order problems or litigation during execution due to which the contractor is unable to execute the work, may be deducted from the total project length for payment purposes. The total length calculated here is only for payment purposes and will not be affected and referred in other clauses of the contract Agreement.**

1.3.2 Minor Bridge and underpasses/Overpasses.

Procedure for estimating the value of minor Bridge and underpasses/Overpasses shall be as stated in table 1.3.2:

Table 1.3.2

Stage of Payment	Weightage	Payment Procedure
<p><b>A- Widening and repairs of minor bridges</b>  (length&gt;6m and &lt; 60m)</p>	<p>0%</p>	<p>Cost of each minor Bridge shall be determined on pro rata basis with respect to the total linear length of the minor Bridges. Payment shall be made on completion of widening &amp; repair works of a minor Bridge.</p>
<p><b>A.2-New Minor bridges</b>  (length&gt;6m and &lt; 60m)  <b>(1) Foundation +Sub-Structure:</b> On completion of the foundation work including foundations for wing and return walls, abutments, piers upto the abutment/pier cap.</p>	<p>82.41%</p>	<p>(i) Foundation +Sub- Structure: Cost of each minor bridge shall be determined on pro rata basis with respect to the total linear length (m) of the minor bridges. Payment against foundation + sub-structure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation + substructure of each bridge subject to completion of at least two foundations along with sub-structure up to abutment/pier cap level of each bridge.</p> <p>In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.</p>
<p><b>(2) Super-structure:</b> On completion of the superstructure in all respects including wearing coat, bearings, expansion joints, hand rails, crash barriers, road signs &amp; markings, tests on completion etc. complete in all respect.</p>	<p>9.83%</p>	<p><b>Super-structure:</b>  Payment shall be made on pro rata basis on completion of a stage i.e. completion of super-structure of at least one span in all respects as specified in the column of "Stage of payment" in this sub clause.</p> <p>In case of structures where pre-cast girders have been proposed by the Contractor, 50% of the stage payment shall be due and payable on casting of girders for each span and balance 50% of the stage payment shall be made on completion of stage specified as above</p>

<p><b>(3) Approaches:</b> On completion of approaches including retaining wall, stone pitching, protection work complete in all respects &amp; fit for use.</p>	<p>7.76%</p>	<p><b>Approaches:</b> Payment shall be made on pro rata basis on completion of a stage i.e. completion of approaches in all respects as specified in the column of "Stage of payment" in this sub clause.</p>
<p><b>(4) Guide Bunds and River Training works:</b> On completion Guide Bunds and River Training works complete in all respects</p>	<p>0 %</p>	<p><b>Guide Bunds and River Training works:</b> Payment shall be made on pro rata basis on completion of a stage i.e. completion of Guide Bunds and River Training works complete in all respects as specification.</p>
<p><b>B.1 Widening and repairs of underpasses/overpasses</b></p>	<p>0%</p>	<p>Cost of each underpasses/overpasses shall be determined on pro rata basis with respect to the total linear length of the underpasses/overpasses. Payment shall be made on completion of widening &amp; repair works of a underpasses/overpass.</p>
<p><b>B.2-New underpasses/overpasses:</b></p> <p><b>(i) Foundation +Sub-Structure:</b> On completion of the foundation work including foundations for wing and return walls, abutments, piers upto the abutment/pier cap.</p>	<p>0%</p>	<p><b>Foundation:</b></p> <p>Cost of each underpass/overpass shall be determined on pro rata basis with respect to the total linear length (m) of the underpass/overpass. Payment against foundation + Sub structure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of each underpass/overpass subject to completion of at least two foundations along with sub-structure up to abutment/pier cap level each underpass/overpass.</p> <p>In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.</p>

<p>(ii) <b>Super-structure:</b> On completion of the superstructure in all respects including wearing coat, bearings, expansion joints, hand rails, crash barriers, road signs &amp; markings, tests on completion etc. complete in all respect. Wearing Coat (a) in case of Overpass- wearing coat including expansion joints complete in all respects as specified and (b) in case of underpass- rigid pavement including drainage facility complete in all respects as specified as specified.</p>	0%	<p><b>Super-structure:</b> Payment shall be made on pro rata basis on completion of a stage i.e. completion of super-structure of at least one span in all respects as specified in the column of “Stage of payment” in this sub clause.</p>
<p>(iii) <b>Approaches:</b> On completion of approaches including Retaining walls/ Reinforced Earth walls, stone pitching, protection works complete in all Respect and fit for use.</p>	0%	<p>Approaches: Payment shall be made on pro-rata basis on completion of a stage i.e. completion of approaches in all respect as specified.</p>

### 1.3.3 Major Bridge works ROB/RUB and Structures.

Procedure for estimating the value of major Bridge works, ROB/RUB and Structures shall be as stated in table 1.3.3:

Table 1.3.3

Stage of Payment	Weightage	Payment Procedure
<p><b>A.1- Widening and repairs of Major bridges</b> <b>(i) Foundation:</b></p>	0%	<p><b>Foundation:</b> Cost of each Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridges. payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of at least Two foundations of the major Bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.</p>

<b>(2)Substructure:</b>	0%	<b>Substructure:</b> Payment against Substructure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of substructure of the major bridge subject to completion of atleast two sub-structures of abutments /piers upto abutment/pier cap level of the major bridge.
<b>(3) Super-structure:</b> including bearings.	0%	<b>Super-structure:</b> Payment shall be made on pro rata basis on completion of a stage i.e. completion of super-structure including bearing of at least one span in all respects as specified.
<b>(4) Wearing Coat including expansion Joints</b>	0%	<b>Wearing Coat:-</b> Payment shall be made on completion of wearing coat including expansion joint complete in all respects as specified.
<b>(5) Miscellaneous Items like Hand Rails, Crash Barriers, Road Markings etc.</b>	0%	<b>Miscellaneous:</b> Payment shall be made on Completion of all Misc Works like Hand Rails, Crash Barriers, Road Markings etc. complete in all respects as specified.
<b>(6) Wing Walls/Return Walls</b>	0%	<b>Wing Walls/Return Walls :</b> Payment shall be made on Completion of all wing walls/Return walls complete in all respects as specified.
<b>(7) Guide Bunds and River Training works, etc.</b>	0%	<b>Guide Bunds and River Training works:</b> Payment shall be made on completion of all Guide Bunds/River Training works etc. complete in all respects as specified.
<b>(8) Approaches:</b> (including retaining walls, stone pitching, protection works)	0%	<b>Approaches:</b> Payment shall be made on pro rata basis on completion of 10% of the scope of each stage.

<p><b>A.2- New Major bridges</b></p> <p><b>(i) Foundation:</b></p>	<p>34.99%</p>	<p><b>Foundation:</b></p> <p>Cost of each Major Bridge shall be determined on pro rata basis with respect to the total linear length (m) of the Major Bridges. payment against foundation shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of foundation of the major Bridge subject to completion of at least Two foundations of the major Bridge. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.</p>
<p><b>(2) Substructure:</b></p>	<p>30.43%</p>	<p><b>Substructure:</b></p> <p>payment against substructure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of substructure of major bridge subject to completion of atleast two sub-structures of abutments/piers upto abutment/pier cap level of the major bridge.</p>
<p><b>(3) Super-structure:</b> including bearings.</p>	<p>23.46%</p>	<p><b>Super-structure:</b></p> <p>Payment shall be made on pro rata basis on completion of a stage i.e. completion of super-structure including bearing of at least one span in all respects as specified.</p> <p>In case of structures where pre-cast girders have been proposed by the Contractor, 50% of the stage payment shall be due and ayable on casting of girders for each span and balance 50% of the stage payment shall be made on completion of stage specified as above</p>
<p><b>(4) Wearing Coat including expansion Joints</b></p>	<p>5.42%</p>	<p><b>Wearing Coat:-</b></p> <p>Payment shall be made on completion of wearing coat including expansion joint complete in all respects as specified.</p>

<b>(5) Miscellaneous Items like</b> Hand Rails, Crash Barriers, Road Markings etc.	2.3%	<b>Miscellaneous:</b> Payment shall be made on Completion of all Misc Works like Hand Rails, Crash Barriers, Road Markings etc. complete in all respects as specified.
<b>(6) Wing Walls/Return Walls</b>	0%	<b>Wing Walls/Return Walls :</b> Payment shall be made on Completion of all wing walls/Return walls complete in all respects as specified.
<b>(7) Guide Bunds and River Training works, etc.</b>	0.44%	<b>Guide Bunds and River Training works:</b> Payment shall be made on completion of all Guide Bunds/River Training works etc. complete in all respects as specified.
<b>(8) Approaches:</b> (including retaining walls, stone pitching, protection works)	2.96%	<b>Approaches:</b> Payment shall be made on pro rata basis on completion of 10% of the scope of each stage.
<b>B.1- Widening and repairs of</b> <b>(a) ROB</b> <b>(b) RUB</b> (1)Foundation	0%	(i) Foundation: Cost of each ROB/RUB shall be determined on pro rata basis with respect to the total linear length (m) of the ROB/RUBs. Payment against foundation shall be made on prorated basis on completion of a stage i.e. not less than 25% of the scope of foundation of the ROB/RUB subject to completion of at least two foundations of the ROB/RUB.  In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
(2) Sub-structure:	0%	(ii) Sub-Structure: Payment against Substructure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of substructure of the ROB/RUB subject to completion of at least two sub-structures of abutments /piers upto abutment/pier cap level of the ROB/RUB.
(3) Super-structure (including bearings)	0%	<b>(iii) Super-structure:</b> Payment shall be made on pro rata basis on completion of a stage i.e. completion of super-structure including bearings of

		atleast one span in all respects as specified.
(4) Wearing coat including expansion joints in case of ROB. In case of RUB, rigid pavement under RUB including drainage facility as Specified.	0%	<b>(iv) Wearing coat:</b> Payment shall be made on completion of (a) in case of ROB- wearing coat including expansion joints complete in all respects as specified and (b) in case of RUB- rigid pavement under RUB including drainage facility complete in all respects as specified.
(5) Miscellaneous Items like hand rail, crash barriers, road markings etc.	0%	<b>(v) Miscellaneous:</b> Payment shall be made on completion of miscellaneous work like hand rail, crash barriers, road markings etc. complete in all respects as specified.
(6) Wing walls/return walls	0%	<b>(vi) Wing walls/return walls:</b> Payment shall be made on completion of all wing walls/return walls complete in all respects as specified.
<b>(7) Approaches:</b> (including Retaining walls, stone pitching and protection works)	0%	<b>Approaches:</b> Payment shall be made on pro rata basis on completion of a stage in all respect as specified.
<b>B.2- New ROB/RUB</b> (1)Foundation	0%	(i) Foundation: Cost of each ROB/RUB shall be determined on pro rata basis with respect to the total linear length (m) of the ROB/RUBs. Payment against foundation shall be made on prorated basis on completion of a stage i.e. not less than 25% of the scope of foundation of the ROB/RUB subject to completion of at least two foundations of the ROB/RUB.  In case where load testing is required for foundation, the trigger of first payment shall include load testing also where specified.
(2) Sub-structure:	0%	(ii) Sub-Structure: Payment against Substructure shall be made on pro-rata basis on completion of a stage i.e. not less than 25% of the scope of substructure of the ROB/RUB subject to completion of at least

		two sub-structures of abutments /piers upto abutment/pier cap level of the ROB/RUB.
(3) Super-structure (including bearings)	0%	<b>(iii) Super-structure:</b> Payment shall be made on pro rata basis on completion of a stage i.e. completion of super-structure including bearings of atleast one span in all respects as specified.
(4) Wearing coat including expansion joints in case of ROB. In case of RUB, rigid pavement under RUB including drainage facility as Specified.	0%	<b>(iv) Wearing coat:</b> Payment shall be made on completion of (a) in case of ROB- wearing coat including expansion joints complete in all respects as specified and (b) in case of RUB- rigid pavement under RUB including drainage facility complete in all respects as specified.
(5) Miscellaneous Items like hand rail, crash barriers, road markings etc.	0%	<b>(v) Miscellaneous:</b> Payment shall be made on completion of miscellaneous work like hand rail, crash barriers, road markings etc. complete in all respects as specified.
(6) Wing walls/return walls	0%	<b>(vi) Wing walls/return walls:</b> Payment shall be made on completion of all wing walls/return walls complete in all respects as specified.
<b>(7) Approaches:</b> (including Retaining walls, stone pitching and protection works)	0%	<b>Approaches:</b> Payment shall be made on pro rata basis on completion of a stage in all respect as specified.
<b>C.1- Widening &amp; Repairs of Elevated Section/Flyovers/Grade Seperators.</b> (1)Foundation	0%	(i) Foundation: Cost of each structure shall be determined on pro rata basis with respect to the total linear length (m) of the structures. Payment against foundation shall be made on prorated basis on completion of a stage i.e. not less than 25% of the scope of foundation of the structure subject to completion of atleast two foundations of the structure. In case where load testing is required for foundation, the trigger of first payment shall include load testing also where

		specified.
(2) Sub-structure:	0%	<b>(ii) Sub-structure:</b> Payment against Sub- structure shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of sub-structure of the Structure subject to completion of atleast two sub-structures of abutments/piers upto abutment/pier cap level of the structure..
(3) Super-structure : including Bearings.	0%	<b>(iii) Super-structure:</b> Payment shall be made on pro rata basis on completion of a stage i.e. completion of super-structure including bearings of atleast one span in all respects as specified.
(4) Wearing coat including expansion joints.	0%	<b>(iv) Wearing coat:</b> Payment shall be made on completion of wearing coat including expansion Joints Complete in all respect as specified.
(5) Miscellaneous Items like hand rail, crash barriers, road markings etc.	0%	<b>(v) Miscellaneous:</b> Payment shall be made on completion of miscellaneous work like hand rail, crash barriers, road markings etc. complete in all respects as specified.
(6) Wing walls/return walls	0%	<b>(vi) Wing walls/return walls:</b> Payment shall be made on completion of all wing walls/return walls complete in all respects as specified.
<b>(7) Approaches:</b> (including Retaining walls/Reinforced Earth wall, stone pitching and protection works)	0%	Payment shall be made on pro rata basis on completion of a stage in all respect as specified.
<b>C.2- New Elevated Section/Flyovers/Grade Seperators.</b> (1)Foundation	0%	(i) Foundation: Cost of each structure shall be determined on pro rata basis with respect to the total linear length (m) of the structures. Payment against foundation shall be made on prorated basis on completion of a stage i.e. not less than 25% of the scope of foundation of the structure subject to completion of atleast two foundations of the structure .  In case where load testing is

		required for foundation, the trigger of first payment shall include load testing also where specified.
(2) Sub-structure:	0%	<b>(ii) Sub-structure:</b> Payment against Sub- structure shall be made on pro rata basis on completion of a stage i.e. not less than 25% of the scope of sub-structure of the Structure subject to completion of atleast two sub-structures of abutments/piers upto abutment/pier cap level of the structure..
(3) Super-structure : including Bearings.	0%	<b>(iii) Super-structure:</b> Payment shall be made on pro rata basis on completion of a stage i.e. completion of super-structure including bearings of atleast one span in all respects as specified.
(4) Wearing coat including expansion joints.	0%	<b>(iv) Wearing coat:</b> Payment shall be made on completion of wearing coat including expansion Joints Complete in all respect as specified.
(5) Miscellaneous Items like hand rail, crash barriers, road markings etc.	0%	<b>(v) Miscellaneous:</b> Payment shall be made on completion of miscellaneous work like hand rail, crash barriers, road markings etc. complete in all respects as specified.
(6) Wing walls/return walls	0%	<b>(vi) Wing walls/return walls:</b> Payment shall be made on completion of all wing walls/return walls complete in all respects as specified.
<b>(7) Approaches:</b> (including Retaining walls/Reinforced Earth wall, stone pitching and protection works)	0%	Payment shall be made on pro rata basis on completion of a stage in all respect as specified.

- Note: (1) In case of innovate Major Bridge projects like cable suspension/cable stayed/ Extra Dozed and exceptionally long span bridges, the schedule may be modified as per site requirements before bidding with due approval of Competent Authority.
- (2) The Schedule for exclusive tunnel projects may be prepared as per site requirements before bidding with due approval of Competent Authority.

#### 1.3.4 Other works.

Procedure for estimating the value of other works done shall be as stated in table 1.3.4.

**Table 1.3.4**

<b>Stage of Payment</b>	<b>Weightage</b>	<b>Payment Procedure</b>
(i) Toll plaza	0%	Unit of measurement is each completed toll plaza. Payment of each toll plaza shall be made on pro rata basis with respect to the total of all toll plazas.
(ii) Road side drains	5.61%	Unit of measurement is linear length in km. Payment shall be made on pro rata basis on completion of a stage in a length of not less than 5 % (five per cent) of the total length.
(iii) Road signs, markings, km stones, safety devices,...	4.82%	
(iv) Project Facilities		Payment shall be made on pro rata basis for completed facilities.
a) Bus bays	0%	
b) Truck lay-byes	0.30%	
c) Rest areas	0.22%	
d) others	0%	
(v) Road side plantation	0%	
(vi) Repair of protection works other than approaches to the bridges, elevated sections/ flyovers/grade separators and ROBs/RUBs.	0%	
(vii) Safety and traffic management during construction	0%	Payment shall be made on prorata basis every six months.
(viii) Protection Works		Unit of measurement is linear length in km. Payment shall be made on pro rata basis on completion of a stage in a length of not less than 5 % (five per cent) of the total length.
a. Retaining wall	43.76%	
b. Breast wall	32.44%	
c. Gabion Structure	9.71%	
d. Hydroseeding	2.68%	
(ix) Other Works	0.46%	

**2. Procedure for payment for Maintenance**

- a) The cost for maintenance shall be as stated in Clause 14.1.1.
- b) Payment for Maintenance shall be made in quarterly instalments in accordance with the provisions of Clause 19.7

SCHEDULE - I  
*(See Clause 10.2 (iv))*

**DRAWINGS**

**1 Drawings**

In compliance of the obligations set forth in Clause 10.2 of this Agreement, the Contractor shall furnish to the Authority's Engineer, free of cost, all Drawings listed in Annex-I of this Schedule-I.

**2 Additional Drawings**

If the Authority's Engineer determines that for discharging its duties and functions under this Agreement, it requires any drawings other than those listed in Annex-I, it may by notice require the Contractor to prepare and furnish such drawings forthwith. Upon receiving a requisition to this effect, the Contractor shall promptly prepare and furnish such drawings to the Authority's Engineer, as if such drawings formed part of Annex-I of this Schedule-I.

## Annex - I

### (Schedule - I)

#### List of Drawings

1. A minimum list of the drawings of the various components/elements of the project highway and project facility required to be submitted by the Contractor is given below:
  - (a) Drawing of horizontal alignment, vertical profile and detailed cross sections
  - (b) Drawings of cross drainage works i.e. Bridges/Culverts/Flyovers and Other Structures.
  - (c) Drawings for River Training works
  - (d) Drawings of interchanges, major intersections and underpasses
  - (e) Drawing of control centre
  - (f) Drawings of road furniture items including traffic signage, marking, safety barriers, etc.
  - (g) Drawings of traffic diversions plans and traffic control measures
  - (h) Drawings of road drainage measures
  - (i) Drawings of typical details slope protection measures
  - (j) Drawings of landscaping and horticulture
  - (k) Drawings of pedestrian crossing
  - (k) Drawings of street lighting
  - (l) Any other drawings as per instruction of Authority Engineer
  - (m) General Arrangement showing Base Camp and Administrative Block

## Schedule - J

(See Clause 10.3 (ii))

### Project Completion Schedule

#### 1. Project Completion Schedule

During Construction period, the Contractor shall comply with the requirements set forth in this Schedule-J for each of the Project Milestones and the Scheduled Completion Date. Within 15 (fifteen) days of the date of each Project Milestone, the Contractor shall notify the Authority of such compliance along with necessary particulars thereof.

#### 2. Project Milestone-I

- (i) Project Milestone-I shall occur on the date falling on the 192<sup>nd</sup> day from then Appointed Date (the "Project Milestone- I").
- (ii) Prior to the occurrence of Project Milestone-I, the Contractor shall have commenced construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 10% (ten per cent) of the Contract Price.

#### 3. Project Milestone-II

- (i) Project Milestone-II shall occur on the date falling on the 329<sup>th</sup> day from the Appointed Date (the "Project Milestone- II").
- (ii) Prior to the occurrence of Project Milestone-II, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 35% (thirty five per cent) of the Contract Price and should have started construction of all bridges

#### 4. Project Milestone-III

- (i) Project Milestone-III shall occur on the date falling on the 466<sup>th</sup> day from the Appointed Date (the "Project Milestone- III").
- (ii) Prior to the occurrence of Project Milestone-III, the Contractor shall have continued with construction of the Project Highway and submitted to the Authority duly and validly prepared Stage Payment Statements for an amount not less than 70% (seventy per cent) of the Contract Price and should have started construction of all project facilities.

5. Scheduled Completion Date

- (i) The Scheduled Completion Date shall occur on the 548<sup>th</sup> day from the Appointed Date.
- (ii) On or before the Scheduled Completion Date, the Contractor shall have completed construction in accordance with this Agreement.

6. Extension of time

Upon extension of any or all of the aforesaid Project Milestones or the Scheduled Completion Date, as the case may be, under and in accordance with the provisions of this Agreement, the Project Completion Schedule shall be deemed to have been amended accordingly.

SCHEDULE - K  
(See Clause 12.1 (ii))

**Tests on Completion**

**1 Schedule for Tests**

- (i) The Contractor shall, no later than 30 (thirty) days prior to the likely completion of construction, notify the Authority's Engineer and the Authority of its intent to subject the Project Highway to Tests, and no later than 10 (ten) days prior to the actual date of Tests, furnish to the Authority's Engineer and the Authority detailed inventory and particulars of all works and equipment forming part of Works.
- (ii) The Contractor shall notify the Authority's Engineer of its readiness to subject the Project Highway to Tests at any time after 10 (ten) days from the date of such notice, and upon receipt of such notice, the Authority's Engineer shall, in consultation with the Contractor, determine the date and time for each Test and notify the same to the Authority who may designate its representative to witness the Tests. The Authority's Engineer shall thereupon conduct the Tests itself or cause any of the Tests to be conducted in accordance with Article 12 and this Schedule-K.

**2 Tests**

- (i) Visual and physical test: The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include [\*\*\*].
- (ii) Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a Network Survey Vehicle (NSV) fitted with latest equipments and the maximum permissible roughness for purposes of this Test shall be [2,000 (two thousand)] mm for each kilometer.
- (iii) Tests for bridges: All major and minor bridges shall be subjected to the rebound hammer and ultrasonic pulse velocity tests, to be conducted in accordance with the procedure described in Special Report No. 17: 1996 of the IRC Highway Research Board on Nondestructive Testing Techniques, at two spots in every span, to be chosen at random by the Authority's Engineer. Bridges with a span of 15 (fifteen) metres or more shall also be subjected to load testing.
- (iv) Other tests: The Authority's Engineer may require the Contractor to carry out or cause to be carried additional tests, in accordance with Good Industry Practice, for determining the compliance of the Project Highway with Specifications and standards, except tests as specified in clause 5, but shall include measuring the reflectivity of road markings and road signs; and measuring the illumination level (lux) of lighting using requisite testing equipment.

- (v) Environmental audit: The Authority's Engineer shall carry out a check to determine conformity of the Project Highway with the environmental requirements set forth in Applicable Laws and Applicable Permits.
- (vi) Safety Audit: The Authority's Engineer shall carry out, or cause to be carried out, a safety audit to determine conformity of the Project Highway with the safety requirements and Good Industry Practice.

**3 Agency for conducting Tests**

All Tests set forth in this Schedule-K shall be conducted by the Authority's Engineer or such other agency or person as it may specify in consultation with the Authority.

**4 Completion Certificate**

Upon successful completion of Tests, the Authority's Engineer shall issue the Completion Certificate in accordance with the provisions of Article 12.

- 5. The Authority Engineer will carry out tests with following equipment at his own cost in the presence of contractor's representative.

S.No.	Key metrics of Asset	Equipment to be used	Frequency of condition survey
1	Surface defects of pavement	Network Survey Vehicle (NSV)	At least twice a year (As per survey months defined for the state basis rainy season)
2	Roughness of pavement	Network Survey Vehicle (NSV)	At least twice a year (As per survey months defined for the state basis rainy season)
3	Strength of pavement	Falling Weight Deflectometer (FWD)	At least once a year
4	Bridges	Mobile Bridge Inspection Unit (MBU)	At least twice a year (As per survey months defined for the state basis rainy season)
5	Road signs	Retro-reflectometer	At least twice a year (As per survey months defined for the state basis rainy season)

The first testing with the help of NSV shall be conducted at the time of issue of Completion Certificate.

Schedule – L

(See Clause 12.2)

**Completion Certificate**

- 1 I, ..... (Name of the Authority’s Engineer), acting as the Authority’s Engineer, under and in accordance with the Agreement dated ..... (the “Agreement”), for **“Construction of two lanes with paved shoulders road from Tamenglong to Mahur (NH-137) in the State of Manipur starting from km 54.180 near Azuram to km 80.630 near Mandeu (Package-5) on EPC mode.”** (the “Project Highway”) on Engineering, Procurement and Construction (EPC) basis through ..... (Name of Contractor), hereby certify that the Tests in accordance with Article 12 of the Agreement have been successfully undertaken to determine compliance of the Project Highway with the provisions of the Agreement, and I am satisfied that the Project Highway can be safely and reliably placed in service of the Users thereof.
  
- 2 It is certified that, in terms of the aforesaid Agreement, all works forming part of Project Highway have been completed, and the Project Highway is hereby declared fit for entry into operation on this the ..... day of ..... 20.....

SIGNED, SEALED AND  
DELIVERED

For and on behalf of

the Authority’s Engineer by:

(Signature)

(Name)

(Designation)

(Address)

SCHEDULE - M  
*(See Clauses 14.6, 15.2 and 19.7)*

**PAYMENT REDUCTION FOR NON-COMPLIANCE**

**1. Payment reduction for non-compliance with the Maintenance Requirements**

- (i) Monthly lump sum payments for maintenance shall be reduced in the case of non-compliance with the Maintenance Requirements set forth in Schedule-E.
- (ii) Any deduction made on account of non-compliance with the Maintenance Requirements shall not be paid even after compliance subsequently. The deductions shall continue to be made every month until compliance is done.
- (iii) The Authority's Engineer shall calculate the amount of payment reduction on the basis of weightage in percentage assigned to non-conforming items as given in Paragraph 2.

**2. Percentage reductions in lump sum payments**

- The following percentages shall govern the payment reduction:

S. No.	Item/Defect/Deficiency	Percentage
<b>(a)</b>	<b>Carriageway/Pavement</b>	
(i)	Potholes, cracks, other surface defects	15%
(ii)	Repairs of Edges, Rutting	5%
<b>(b)</b>	<b>Road, Embankment, Cuttings, Shoulders</b>	
(i)	Edge drop, inadequate crossfall, undulations, settlement, potholes, ponding, obstructions	10%
(ii)	Deficient slopes, raincuts, disturbed pitching, vegetation growth, pruning of trees	5%
<b>(c)</b>	<b>Bridges and Culverts</b>	
(i)	Desilting, cleaning, vegetation growth, damaged pitching, flooring, parapets, wearing course, footpaths, any damage to foundations	20%
(ii)	Any Defects in superstructures, bearings and sub-structures	10%
<b>S. No.</b>	<b>Item/Defect/Deficiency</b>	<b>Percentage</b>
(iii)	Painting, repairs/replacement kerbs, railings, parapets, guideposts/crash barriers	5%
<b>(d)</b>	<b>Roadside Drains</b>	
(i)	Cleaning and repair of drains	5%
<b>(e)</b>	<b>Road Furniture</b>	
(i)	Cleaning, painting, replacement of road signs, delineators, road markings, 200 m/km/5 <sup>th</sup> km stones	5%
<b>(f)</b>	<b>Miscellaneous Items</b>	
(i)	Removal of dead animals, broken down/accidented vehicles, fallen trees, road blockades or malfunctioning of mobile crane	10%
(ii)	Any other Defects in accordance with paragraph 1.	5%
<b>(g)</b>	<b>Defects in Other Project Facilities</b>	5%

- (ii) The amount to be deducted from monthly lump-sum payment for non compliance of particular item shall be calculated as under:

$$R = P/100 \times (M_1 \text{ or } M_2) \times L1/L$$

Where P = Percentage of particular item/Defect/deficiency for deduction

M = Monthly lump-sum payment in accordance with the Bid

L1 = Non-complying length

L = Total length of the road,

R = Reduction (the amount to be deducted for non compliance for a particular item/Defect/deficiency)

The total amount of reduction shall be arrived at by summation of reductions for such items/Defects/deficiency or non compliance.

For any Defect in a part of one kilometer, the non-conforming length shall be taken as one kilometer.

SCHEDULE - N  
(See Clause 18.1.1)

**SELECTION OF AUTHORITY'S ENGINEER**

**1 Selection of Authority's Engineer**

- 1.1 The provisions of the Model Request for Proposal for Selection of Technical Consultants, issued by the Ministry of Finance in May 2009, or any substitute thereof shall apply for selection of an experienced firm to discharge the functions and duties of an Authority's Engineer.
- 1.2 In the event of termination of the Technical Consultants appointed in accordance with the provisions of Paragraph 1.1, the Authority shall appoint another firm of Technical Consultants forthwith and may engage a government-owned entity in accordance with the provisions of Paragraph 3 of this Schedule-N.

**2 Terms of Reference**

The Terms of Reference for the Authority's Engineer (the "TOR") shall substantially conform with Annex 1 to this Schedule N.

**3 Appointment of Government entity as Authority's Engineer**

Notwithstanding anything to the contrary contained in this Schedule, the Authority may in its discretion appoint a government-owned entity as the Authority's Engineer; provided that such entity shall be a body corporate having as one of its primary functions the provision of consulting, advisory and supervisory services for engineering projects; provided further that a government-owned entity which is owned or controlled by the Authority shall not be eligible for appointment as Authority's Engineer.

Annex – I  
(Schedule - N)

**TERMS OF REFERENCE FOR AUTHORITY’S ENGINEER**

**1 Scope**

- (i) These Terms of Reference (the “TOR”) for the Authority’s Engineer are being specified pursuant to the EPC Agreement dated ..... (the “Agreement), which has been entered into between the NHIDCL(the “Authority”) and ..... (the “Contractor”)# **“Construction of two lanes with paved shoulders road from Tamenglong to Mahur (NH-137) in the State of Manipur starting from km 54.180 near Azuram to km 80.630 near Mandeu (Package-5) on EPC mode.”**and a copy of which is annexed hereto and marked as Annex-A to form part of this TOR.  
# - In case the bid of Authority’s Engineer is invited simultaneously with the bid of EPC project, then the status of bidding of EPC project only to be indicated
- (ii) The TOR shall apply to construction and maintenance of the Project Highway.

**2 Definitions and interpretation**

- (i) The words and expressions beginning with or in capital letters and not defined herein but defined in the Agreement shall have, unless repugnant to the context, the meaning respectively assigned to them in the Agreement.
- (ii) References to Articles, Clauses and Schedules in this TOR shall, except where the context otherwise requires, be deemed to be references to the Articles, Clauses and Schedules of the Agreement, and references to Paragraphs shall be deemed to be references to Paragraphs of this TOR.
- (iii) The rules of interpretation stated in Article 1 of the Agreement shall apply, mutatis mutandis, to this TOR.

**3. General**

- (i) The Authority’s Engineer shall discharge its duties in a fair, impartial and efficient manner, consistent with the highest standards of professional integrity and Good Industry Practice.
- (ii) The Authority’s Engineer shall perform the duties and exercise the authority in accordance with the provisions of this Agreement, but subject to obtaining prior written approval of the Authority before determining:
  - (a) any Time Extension;
  - (b) any additional cost to be paid by the Authority to the Contractor;
  - (c) the Termination Payment; or
  - (d) any other matter which is not specified in (a), (b) or (c) above and which creates an obligation or liability on either Party for a sum exceeding Rs. 5,000,000 (Rs. fifty lakh).

- (iii) The Authority's Engineer shall submit regular periodic reports, at least once every month, to the Authority in respect of its duties and functions under this Agreement. Such reports shall be submitted by the Authority's Engineer within 10 (ten) days of the beginning of every month.
- (iv) The Authority's Engineer shall inform the Contractor of any delegation of its duties and responsibilities to its suitably qualified and experienced personnel; provided, however, that it shall not delegate the authority to refer any matter for the Authority's prior approval in accordance with the provisions of Clause 18.2.
- (v) The Authority's Engineer shall aid and advise the Authority on any proposal for Change of Scope under Article 13.
- (vi) In the event of any disagreement between the Parties regarding the meaning, scope and nature of Good Industry Practice, as set forth in any provision of the Agreement, the Authority's Engineer shall specify such meaning, scope and nature by issuing a reasoned written statement relying on good industry practice and authentic literature.

#### **4 Construction Period**

- (i) During the Construction Period, the Authority's Engineer shall review and approve the Drawings furnished by the Contractor along with supporting data, including the geotechnical and hydrological investigations, characteristics of materials from borrow areas and quarry sites, topographical surveys, and the recommendations of the Safety Consultant in accordance with the provisions of Clause 10.1 (vi). The Authority's Engineer shall complete such review and approval and send its observations to the Authority and the Contractor within 15 (fifteen) days of receipt of such Drawings; provided, however that in case of a Major Bridge or Structure, the aforesaid period of 15 (fifteen) days may be extended upto 30 (thirty) days. In particular, such comments shall specify the conformity or otherwise of such Drawings with the Scope of the Project and Specifications and Standards.
- (ii) The Authority's Engineer shall review any revised Drawings sent to it by the Contractor and furnish its comments within 10 (ten) days of receiving such Drawings.
- (iii) The Authority's Engineer shall review the Quality Assurance Plan submitted by the Contractor and shall convey its comments to the Contractor within a period of 21 (twenty-one) days stating the modifications, if any, required thereto.
- (iv) The Authority's Engineer shall complete the review and approve of the methodology proposed to be adopted by the Contractor for executing the Works, and convey its comments to the Contractor within a period of 10 (ten) days from the date of receipt of the proposed methodology from the Contractor.
- (v) The Authority's Engineer shall grant written approval to the Contractor, where necessary, for interruption and diversion of the flow of traffic in the existing lane(s) of the Project Highway for purposes of maintenance during the Construction Period in accordance with the provisions of Clause 10.4.
- (vi) The Authority's Engineer shall review the monthly progress report furnished by the Contractor and send its comments thereon to the Authority and the Contractor within 7 (seven) days of receipt of such report.

- (vii) The Authority's Engineer shall inspect the Construction Works and the Project Highway and shall submit a monthly Inspection Report bringing out the results of inspections and the remedial action taken by the Contractor in respect of Defects or deficiencies. In particular, the Authority's Engineer shall include in its Inspection Report, the compliance of the recommendations made by the Safety Consultant.
- (viii) The Authority's Engineer shall conduct the pre-construction review of manufacturer's test reports and standard samples of manufactured Materials, and such other Materials as the Authority's Engineer may require.
- (ix) For determining that the Works conform to Specifications and Standards, the Authority's Engineer shall require the Contractor to carry out, or cause to be carried out, tests at such time and frequency and in such manner as specified in the Agreement and in accordance with Good Industry Practice for quality assurance. For purposes of this Paragraph 4.9, the tests specified in the IRC Special Publication-11 (Handbook of Quality Control for Construction of Roads and Runways) and the Specifications for Road and Bridge Works issued by MORTH (the "Quality Control Manuals") or any modification/substitution thereof shall be deemed to be tests conforming to Good Industry Practice for quality assurance.
- (x) The Authority's Engineer shall test check at least 20 (twenty) percent of the quantity or number of tests prescribed for each category or type of test for quality control by the Contractor.
- (xi) The timing of tests referred to in Paragraph 4.9, and the criteria for acceptance/rejection of their results shall be determined by the Authority's Engineer in accordance with the Quality Control Manuals. The tests shall be undertaken on a random sample basis and shall be in addition to, and independent of, the tests that may be carried out by the Contractor for its own quality assurance in accordance with Good Industry Practice.
- (xii) In the event that results of any tests conducted under Clause 11.10 establish any Defects or deficiencies in the Works, the Authority's Engineer shall require the Contractor to carry out remedial measures.
- (xiii) The Authority's Engineer may instruct the Contractor to execute any work which is urgently required for the safety of the Project Highway, whether because of an accident, unforeseeable event or otherwise; provided that in case of any work required on account of a Force Majeure Event, the provisions of Clause 21.6 shall apply.
- (xiv) In the event that the Contractor fails to achieve any of the Project Milestones, the Authority's Engineer shall undertake a review of the progress of construction and identify potential delays, if any. If the Authority's Engineer shall determine that completion of the Project Highway is not feasible within the time specified in the Agreement, it shall require the Contractor to indicate within 15 (fifteen) days the steps proposed to be taken to expedite progress, and the period within which the Project Completion Date shall be achieved. Upon receipt of a report from the Contractor, the Authority's Engineer shall review the same and send its comments to the Authority and the Contractor forthwith.

- (xv) The Authority's Engineer shall obtain from the Contractor a copy of all the Contractor's quality control records and documents before the Completion Certificate is issued pursuant to Clause 12.4.
- (xvi) Authority's Engineer may recommend to the Authority suspension of the whole or part of the Works if the work threatens the safety of the Users and pedestrians. After the Contractor has carried out remedial measure, the Authority's Engineer shall inspect such remedial measures forthwith and make a report to the Authority recommending whether or not the suspension hereunder may be revoked.
- (xvii) In the event that the Contractor carries out any remedial measures to secure the safety of suspended works and Users, and requires the Authority's Engineer to inspect such works, the Authority's Engineer shall inspect the suspended works within 3 (three) days of receiving such notice, and make a report to the Authority forthwith, recommending whether or not such suspension may be revoked by the Authority.
- (xviii) The Authority's Engineer shall carry out, or cause to be carried out, all the Tests specified in Schedule-K and issue a Completion Certificate or Provisional Certificate, as the case may be. For carrying out its functions under this Paragraph 4.18 and all matters incidental thereto, the Authority's Engineer shall act under and in accordance with the provisions of Article 12 and Schedule-K.

## **5. Maintenance Period**

- (i) The Authority's Engineer shall aid and advise the Contractor in the preparation of its monthly Maintenance Programme and for this purpose carry out a joint monthly inspection with the Contractor.
- (ii) The Authority's Engineer shall undertake regular inspections, at least once every month, to evaluate compliance with the Maintenance Requirements and submit a Maintenance Inspection Report to the Authority and the Contractor.
- (iii) The Authority's Engineer shall specify the tests, if any, that the Contractor shall carry out, or cause to be carried out, for the purpose of determining that the Project Highway is in conformity with the Maintenance Requirements. It shall monitor and review the results of such tests and the remedial measures, if any, taken by the Contractor in this behalf.
- (iv) In respect of any defect or deficiency referred to in Paragraph 3 of Schedule-E, the Authority's Engineer shall, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards and shall also specify the time limit for repair or rectification of any deviation or deterioration beyond the permissible limit.
- (v) The Authority's Engineer shall examine the request of the Contractor for closure of any lane(s) of the Project Highway for undertaking maintenance/repair thereof, and shall grant permission with such modifications, as it may deem necessary, within 5 (five) days of receiving a request from the Contractor. Upon expiry of the permitted period of closure, the Authority's Engineer shall monitor the reopening of such lane(s), and in case of delay, determine the Damages payable by the Contractor to the Authority under Clause 14.5.

## **6 Determination of costs and time**

- (i) The Authority's Engineer shall determine the costs, and/or their reasonableness, that are required to be determined by it under the Agreement.
- (ii) The Authority's Engineer shall determine the period of Time Extension that is required to be determined by it under the Agreement.
- (iii) The Authority's Engineer shall consult each Party in every case of determination in accordance with the provisions of Clause 18.5.

## **7. Payments**

- (i) The Authority's Engineer shall withhold payments for the affected works for which the Contractor fails to revise and resubmit the Drawings to the Authority's Engineer in accordance with the provisions of Clause 10.2.4 (d).
- (ii) Authority's Engineer shall –
  - (a) within 10 (ten) days of receipt of the Stage Payment Statement from the Contractor pursuant to Clause 19.4, determine the amount due to the Contractor and recommend the release of 90 (ninety) percent of the amount so determined as part payment, pending issue of the Interim Payment Certificate; and
  - (b) within 15 (fifteen) days of the receipt of the Stage Payment Statement referred to in Clause 19.4, deliver to the Authority and the Contractor an Interim Payment Certificate certifying the amount due and payable to the Contractor, after adjustments in accordance with the provisions of Clause 19.10.
- (iii) The Authority's Engineer shall, within 15 (fifteen) days of receipt of the Monthly Maintenance Statement from the Contractor pursuant to Clause 19.6, verify the Contractor's monthly statement and certify the amount to be paid to the Contractor in accordance with the provisions of the Agreement.
- (iv) The Authority's Engineer shall certify final payment within 30 (thirty) days of the receipt of the final payment statement of Maintenance in accordance with the provisions of Clause 19.16.

## **8. Other duties and functions**

The Authority's Engineer shall perform all other duties and functions as specified in the Agreement.

## **9 Miscellaneous**

- (i) A copy of all communications, comments, instructions, Drawings or Documents sent by the Authority's Engineer to the Contractor pursuant to this TOR, and a copy of all the test results with comments of the Authority's Engineer thereon, shall be furnished by the Authority's Engineer to the Authority forthwith.

- (ii) The Authority's Engineer shall retain at least one copy each of all Drawings and Documents received by it, including „as-built“ Drawings, and keep them in its safe custody.
- (iii) Within 90 (ninety) days of the Project Completion Date, the Authority's Engineer shall obtain a complete set of as-built Drawings, in 2 (two) hard copies and in micro film form or in such other medium as may be acceptable to the Authority, reflecting the Project Highway as actually designed, engineered and constructed, including an as-built survey illustrating the layout of the Project Highway and setback lines, if any, of the buildings and structures forming part of Project Facilities; and shall hand them over to the Authority against receipt thereof.
- (iv) The Authority's Engineer, if called upon by the Authority or the Contractor or both, shall mediate and assist the Parties in arriving at an amicable settlement of any Dispute between the Parties.
- (v) The Authority's Engineer shall inform the Authority and the Contractor of any event of Contractor's Default within one week of its occurrence.

SCHEDULE – O

*(See Clauses 19.4.1, 19.6.1, and 19.8.1)*

**Forms of Payment Statements**

**1. Stage Payment Statement for Works**

The Stage Payment Statement for Works shall state:

- (a) the estimated amount for the Works executed in accordance with Clause 19.3(i) subsequent to the last claim;
- (b) amounts reflecting adjustments in price for the aforesaid claim;
- (c) the estimated amount of each Change of Scope Order executed subsequent to the last claim;
- (d) amounts reflecting adjustment in price, if any, for (c) above in accordance with the provisions of Clause 13.2(iii) (a);
- (e) total of (a), (b), (c) and (d) above;
- (f) Deductions:
  - (i) Any amount to be deducted in accordance with the provisions of the Agreement except taxes;
  - (ii) Any amount towards deduction of taxes; and
  - (iii) Total of (i) and (ii) above.
- (g) Net claim: (e) – (f) (iii);
- (h) The amounts received by the Contractor upto the last claim:
  - (i) For the Works executed (excluding Change of Scope orders);
  - (ii) For Change of Scope Orders, and
  - (iii) Taxes deducted

**2. Monthly Maintenance Payment Statement**

The monthly Statement for Maintenance Payment shall state:

- (a) the monthly payment admissible in accordance with the provisions of the Agreement;
- (b) the deductions for maintenance work not done;
- (c) net payment for maintenance due, (a) minus (b);
- (d) amounts reflecting adjustments in price under Clause 19.12; and
- (e) amount towards deduction of taxes.

**3. Contractor's claim for Damages**

**Note:** The Contractor shall submit its claims in a form acceptable to the Authority.

SCHEDULE - P  
(See Clause 20.1)

**INSURANCE**

**1. Insurance during Construction Period**

- (i) The Contractor shall effect and maintain at its own cost, from the Appointed Date till the date of issue of the Completion Certificate, the following insurances for any loss or damage occurring on account of Non Political Event of Force Majeure, malicious act, accidental damage, explosion, fire and terrorism:
- (a) insurance of Works, Plant and Materials and an additional sum of [15 (fifteen)] per cent of such replacement cost to cover any additional costs of and incidental to the rectification of loss or damage including professional fees and the cost of demolishing and removing any part of the Works and of removing debris of whatsoever nature; and
  - (b) insurance for the Contractor's equipment and Documents brought onto the Site by the Contractor, for a sum sufficient to provide for their replacement at the Site.
- (ii) The insurance under sub para (a) and (b) of paragraph 1(i) above shall cover the Authority and the Contractor against all loss or damage from any cause arising under paragraph 1.1 other than risks which are not insurable at commercial terms.

**2. Insurance for Contractor's Defects Liability**

The Contractor shall effect and maintain insurance cover of not less than 15% of the Contract Price for the Works from the date of issue of the Completion Certificate until the end of the Defects Liability Period for any loss or damage for which the Contractor is liable and which arises from a cause occurring prior to the issue of the Completion Certificate. The Contractor shall also maintain other insurances for maximum sums as may be required under the Applicable Laws and in accordance with Good Industry Practice.

**3. Insurance against injury to persons and damage to property**

- (i) The Contractor shall insure against its liability for any loss, damage, death or bodily injury, or damage to any property (except things insured under Paragraphs 1 and 2 of this Schedule or to any person (except persons insured under Clause 20.9), which may arise out of the Contractor's performance of this Agreement. This insurance shall be for a limit per occurrence of not less than the amount stated below with no limit on the number of occurrences.  
The insurance cover shall be not less than: Rs. [\*\*\*\*\*]
- (ii) The insurance shall be extended to cover liability for all loss and damage to the Authority's property arising out of the Contractor's performance of this Agreement excluding:
- (a) the Authority's right to have the construction works executed on, over, under, in or through any land, and to occupy this land for the Works; and
  - (b) damage which is an unavoidable result of the Contractor's obligations to execute the Works.

**4. Insurance to be in joint names**

The insurance under paragraphs 1 to 3 above shall be in the joint names of the Contractor and the Authority.

## Schedule-Q

(See Clause 14.10)

### Tests on Completion of Maintenance Period

1. Riding Quality test:

Riding quality test: Riding quality of each lane of the carriageway shall be checked with the help of a calibrated bump integrator and the maximum permissible roughness for purposes of this Test shall be [2,200 (two thousand and two hundred only)] mm for each kilometre.

2. Visual and physical test:

The Authority's Engineer shall conduct a visual and physical check of construction to determine that all works and equipment forming part thereof conform to the provisions of this Agreement. The physical tests shall include measurement of cracking, rutting, stripping and potholes and shall be as per the requirement of maintenance mentioned in Schedule-E.

Schedule-R

(See Clause 14.10)

Taking Over Certificate

I, ..... (Name and designation of the Authority's Representative) under and in accordance with the Agreement dated ..... (the "Agreement"), for **"Construction of two lanes with paved shoulders road from Tamenglong to Mahur (NH-137) in the State of Manipur starting from km 54.180 near Azuram to km 80.630 near Mandeu (Package-5) on EPC mode."** (the "Project Highway") on Engineering, Procurement and Construction (EPC) basis through ..... (Name of Contractor), hereby certify that the Tests on completion of Maintenance Period in accordance with Article 14 of the Agreement have been successfully undertaken to determine compliance of the Project Highway with the provisions of the Agreement and I hereby certify that the Authority has taken over the Project highway from the Contractor on this day.....

SIGNED, SEALED AND DELIVERED

(Signature)

(Name and designation of Authority's Representative)

(Address)

\*\*\*\* End of the Document \*\*\*\*